





Approved	SUGLIANI	CIMMINO	
Signed	CIMMIN0	SUGLIANI	
Date	2018.08.08	2019.05.22	
Modify	1	1	
ev.	_	2	



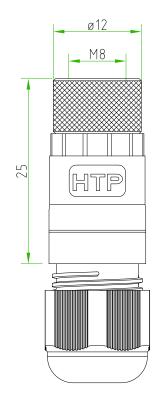






	PRODUCT TYPE	M8 CIRCULAR CONNECTOR FIELD ATTACHABLE	
	HOUSING MATERIAL/COLOUR	<b>REV.02</b> PA66+30%GF /BLACK	
	PRESS-CABLE MATERIAL/COLOUR	<b>REV.02</b> PA66+30%GF /BLACK	
	INTRENAL CORE MATERIAL/COLOUR	<b>REV.02</b> PA66+30%GF /BLACK	
	CONTACTS TYPE	FEMALE SCREW CONTACTS	
	NUMBER OF POLES	4POLES	
ES	SUITABLE CABLE	FROM ø3,5mm TO ø5,5mm	
TUR	MAX.CONDUCTOR SIZE	0,5mm²	
FEA	PROTECTION CLASS	IP67	
CONNECTOR	RATED VOLTAGE	50V AC / 60V DC	
NNE	RATED CURRENT	3A	
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C	
	SEAL MATERIAL	NBR	
	CONNECTOR WITH H.T.P. LOGO		



PACKAGING: **REV.01**SINGLY PACKED IN THE PLASTIC BAG
(PLASTIC BAG WITHOUT ANY LOGO AND LABEL)

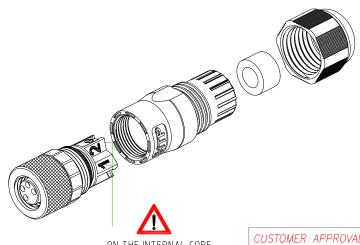

ON THE INTERNAL CORE MUST BE SILK PRINTED THE CONTACTS NUMBERS

Series M8

Customer code:

CUSTOMER	APPROVAL	
SIGNATURE	DATE	
PLEASE SIGN		
AND RETURN		

A 4



THE SIGH PRODUCTS S.R.L.

Designer

Approved

SUGLIANI R.

CIMMINO L.

DESCRIPTION

Date 2018-03-23

Date 2018-03-23

CIRCULAR CONNECTOR M8 FIELD ATTACHABLE, FEMALE, STRAIGHT 180°, 4POLES, EXIT CABLE FROM ø3,5mm TO ø5,5mm CONNECTOR WITH H.T.P.LOGO

2:1

Tollerance ±0.3

Scale

H.T.P.PART NUMBER

08FC4000-S-SK

Д4

Units:

Size:

Drawing n.