




- C 1
- C 2
- C 3
- C 4

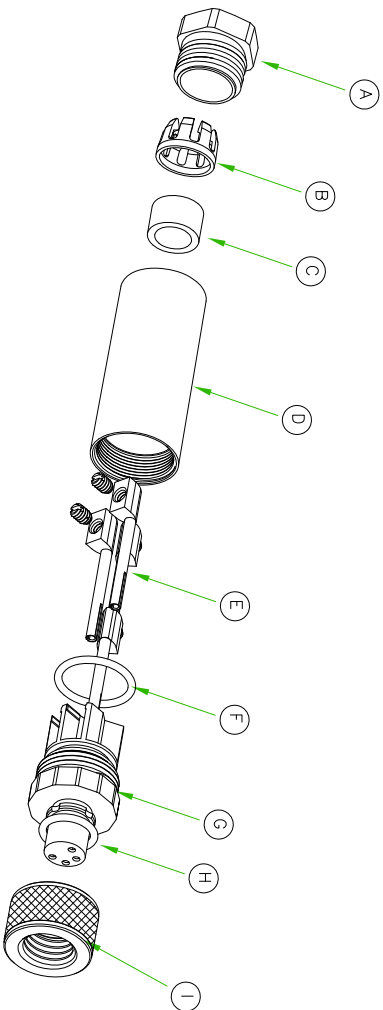



A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M8
H	O-RING
I	M8 NUT Brass+nickel plated (CuZnNi)

CONNECTOR FEATURES

PRODUCT TYPE	M8 FIELD ATTACHABLE
CONTACT TYPE	FEMALE(10 SCREW)
NUMBER OF CONTACTS	4POLES
HOUSING MATERIAL/COLOUR	PA66/BLACK
HOUSING TYPE	180°
COUPLING NUT MATERIAL	BRASS+NICKEL PLATED
O-RING	NBR
CABLE DIAMETER	FROM Ø3,5mm TO Ø5mm
CONDUCTOR SIZE	FROM 0,14mm ² TO 0,5mm ²
RATED VOLTAGE	50V AC / 60V DC
RATED CURRENT	3A
PROTECTION CLASS	IP65
TEMPERATURE RANGE	FROM -40°C TO +90°C
CONNECTOR WITH H.T.P. LOGO	

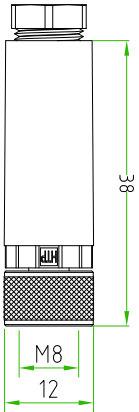

TOLLERANZE		±0.2		DISIGNATORE LORENZO CHINO		DATA 03.08.12		SCALA 1:1				DISIGNO N.			
UDM		ANGOLO		CONTROLLATO											
DESCRIZIONE M8 FEMALE STRAIGHT 180° 4. POLES BLACK HOUSING FIELD ATTACHABLE WITH SCREW CONTACTS. CONNECTOR WITH H.T.P. LOGO												TIPO M8		MATERIALE	
 H.T.P. HIGH TECH PRODUCTS												CODICE 08FC4000-S			