




CONNECTOR MATERIAL: INTERNAL CORE: PA66

CONNECTOR BODY: STAINLESS STEEL AISI304

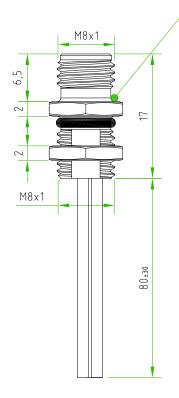


CONNECTOR FEATURES	PRODUCT TYPE	M8 CIRCULAR CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	HOUSING MATERIAL	STAINLESS STEEL AISI304
	O-RING MATERIAL	NBR
	FIXING THREAD	M8X1
	SIZE CUT	7.20mm (+0,1/-0)
	SIZE FIXED NUT(SW)	SW10
	SIZE MOBILE NUT(SW)	SW10
	PROTECTION CLASS	IP67
	RATED VOLTAGE	50V AC/60V DC
	RATED CURRENT	3A
	CONNECTOR WITHOUT ANY LOGO	
WIRES FEATURES	NUMBER OF CONDUCTORS	N°4
	CONDUCTORS SECTION	0.25mm²
	CONDUCTORS INSULATION MATERIAL	PVC
	CONDUCTORS LENGHT	80mm





PAY ATTENTION to the position of the internal core towards the CUT and the exagonal fixed nut.

SIZE CUT(on the panel):





CIMMINO L.

SUGLIANI R.

Designer

Approved

DESCRIPTION

Date 2018-04-05

Date 2018-04-05

CIRCULAR CONNECTOR M8, MALE, TO PANEL, 4POLES, FRONTAL MOUNTING, N°4 PVC SOLDER WIRES 0.25mm² L=80mm, M8X1 FIXING THREAD WITH CUT. CONNECTOR MATERIAL: STAINLESS STEEL AISI304.

2:1

Tollerance ±0.3

Scale

H.T.P.PART NUMBER

08MP4A008-CUT-INOX

Α4

Series

Customer code:

Units:

Size:

Drawing n.