



- BROWN ○ ———— C 1
- BLUE ○ ———— C 3
- BLACK ○ ———— C 4

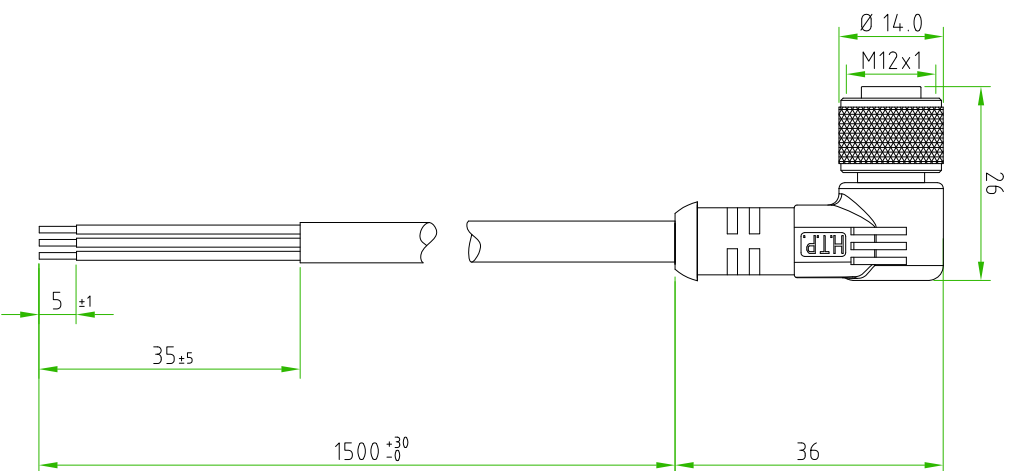

CONNECTOR FEATURES	
CONNECTOR TYPE	M12 90°
CONTACT TYPE	FEMALE 3POLES
CABLE LENGTH	1500mm
PROTECTION CLASS	IP69K
STRIPPING	35mm STANDARD
PEELING AND TINNING	5mm STANDARD
NUMBER OF CONTACTS CONNECTED	N°3
RATED VOLTAGE	250V AC/DC
RATED CURRENT	4A
CONNECTOR WITH H.T.P. LOGO	

CABLE FEATURES	
H.T.P. CABLE CODE	CAV0 C-3-K6-IS USE THE CABLE CAV0 C-31-K6-IS
NUMBER OF CONDUCTORS	N°3
CONDUCTOR SECTION	0,25mm <sup>2</sup> (AWG24)
CABLE MATERIAL	PUR UL style 21576 <b>AVUS</b>
COATING COLOUR	BLACK RAL9005
CONDUCTOR INSULATION MATERIAL	TP0
CABLE DIAMETER	Ø4,1mm
THIS CABLE IS PROVIDED BY H.T.P.	



THE CABLE IS HIGH FLEX " -K6" (CLASS 6).

TOLLERANZE	±0,3	DISIGNAZIONE	DATA	SCALA	DESIGNO N.
UDM	ANGOLIO	LORENZO CHINNO CONTROLLATO	03.09.14	1:1	
DESCRIZIONE M12 FEMALE 90° 3 POLES; WITH CABLE PUR/PUR BLACK 3X0,25mm <sup>2</sup> HIGH FLEX UL/CSA 15m. CONNECTOR WITH H.T.P. LOGO					
				TR09	M12
				CODE	12FA3C1E-K6-IS



H.T.P.

High Tech Products  
HIGH TECH PRODUCTS

H.T.P.