



| | | | | |
|------|--------|------|--------|----------|
| Rev. | Modify | Date | Signed | Approved |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |



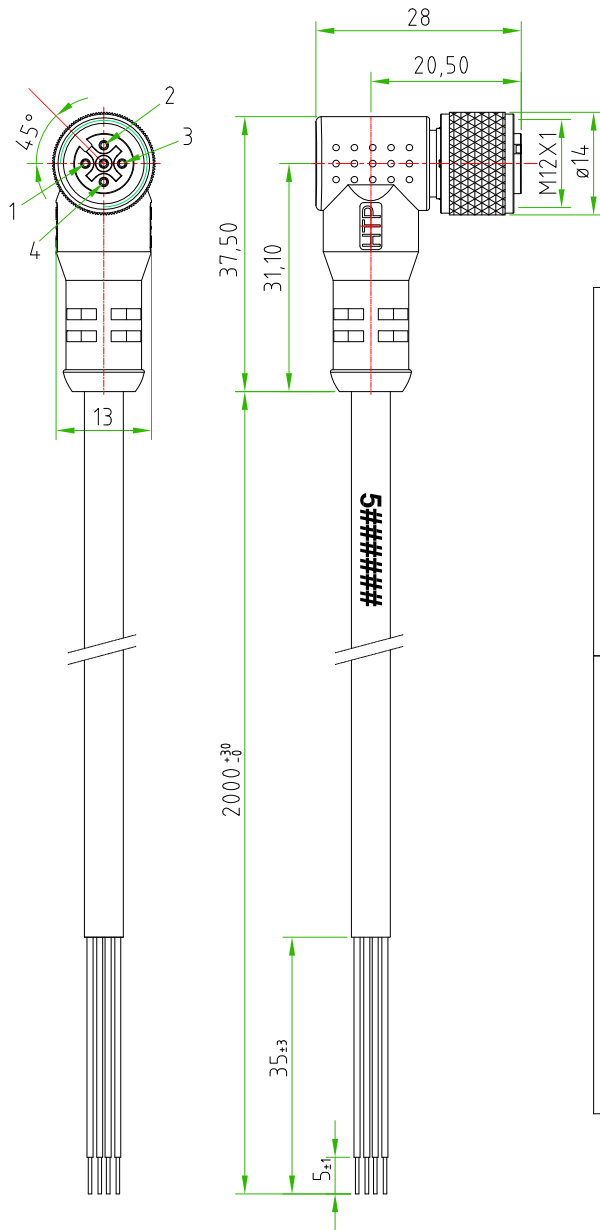

- BROWN ○ ○ ○ ○ C 1
- WHITE ○ ○ ○ ○ C 2
- BLUE ○ ○ ○ ○ C 3
- BLACK ○ ○ ○ ○ C 4

| | | |
|--|--------------------------------|---|
| CONNECTOR FEATURES | PRODUCT TYPE | M12 CIRCULAR CONNECTOR WITH MOULDED CABLE |
| | CONNECTOR TYPE | ANGLED 90° |
| | CONTACTS TYPE | FEMALE 4POLES |
| | NUMBER OF CONTACTS CONNECTED | N°4 |
| | PROTECTION CLASS | IP69K |
| | RATED VOLTAGE | 250V AC/DC |
| | RATED CURRENT | 4A |
| CONNECTOR WITH H.T.P.LOGO | | |
| CABLE FEATURES | H.T.P.CABLE CODE | CAVO A-4 |
| | NUMBER OF CONDUCTORS | N°4 |
| | CONDUCTORS SECTION | 0,25mm ² |
| | CABLE MATERIAL | PVC (CEI2022) |
| | COATING COLOUR | BLACK |
| | CONDUCTORS INSULATION MATERIAL | PVC |
| | CABLE LENGHT | 2000mm |
| | STRIPPING | 35mm STANDARD |
| | PEELING AND TINNING | 5mm STANDARD |
| ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5##### | | |

| | |
|-------------------------------|------|
| <i>CUSTOMER APPROVAL</i> | |
| SIGNATURE | DATE |
| | |
| <i>PLEASE SIGN AND RETURN</i> | |



| | | | | | | | | | | |
|---|------------|------|------------|-----------|------|--------|----|----------------|-------------------|-------------------|
| Designer | CIMMINO L. | Date | 2014-11-09 | Tolerance | ±0.3 | Units: | mm | Series | M12 | Drawing n. 1-1 |
| Approved | MAZZOLA M. | Date | 2014-11-09 | Scale | 1:1 | Size: | A4 | Customer code: | | |
| DESCRIPTION | | | | | | | | | H.T.P.PART NUMBER | |
|   CIRCULAR CONNECTOR M12,FEMALE,ANGLED 90°,4POLES, WITH CABLE PVC/PVC CEI2022 4x0.25mm ² ,BLACK COLOUR, L=2m,CONNECTOR WITH H.T.P.LOGO | | | | | | | | | _____ 12FA4A2Z | |