



| | | | | |
|------|--------|------|--------|----------|
| Rev. | Modify | Date | Signed | Approved |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

- BROWN ○ ○ ○ ○ ○ C 1
- WHITE ○ ○ ○ ○ ○ C 2
- BLUE ○ ○ ○ ○ ○ C 3
- BLACK ○ ○ ○ ○ ○ C 4
- GREY ○ ○ ○ ○ ○ C 5

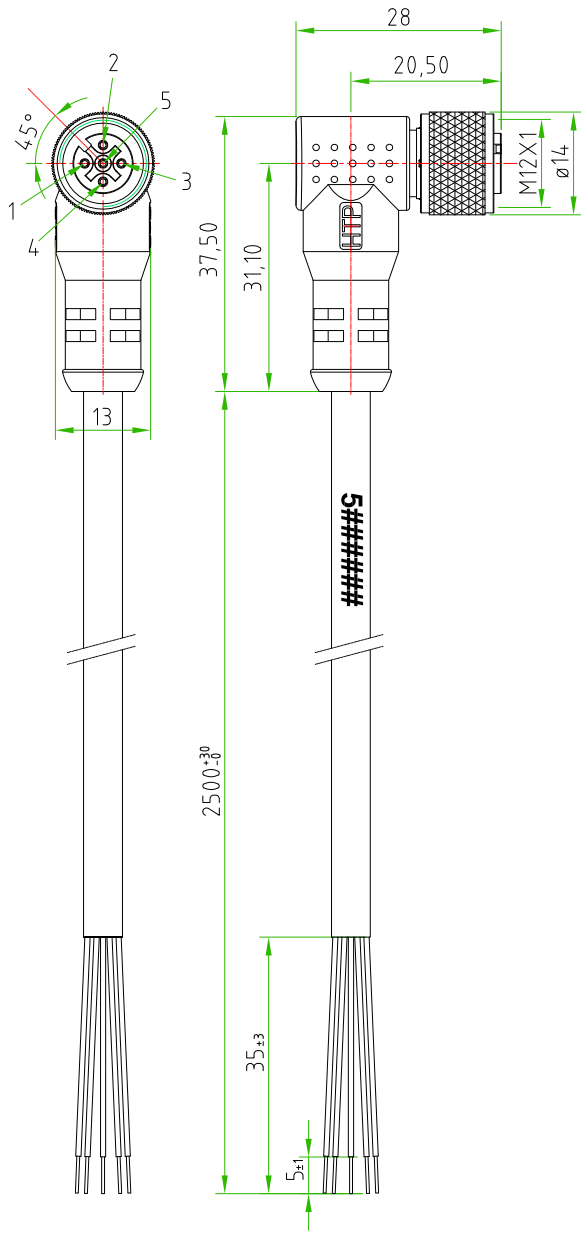

| CONNECTOR FEATURES | |
|--|---|
| PRODUCT TYPE | M12 CIRCULAR CONNECTOR WITH MOULDED CABLE |
| CONNECTOR TYPE | ANGLED 90° |
| CONTACTS TYPE | FEMALE 5POLES |
| NUMBER OF CONTACTS CONNECTED | N°5 |
| PROTECTION CLASS | IP69K |
| RATED VOLTAGE | 60V AC/DC |
| RATED CURRENT | 4A |
| CONNECTOR WITH H.T.P.LOGO | |
| CABLE FEATURES | |
| H.T.P.CABLE CODE | CAVO D-5 |
| NUMBER OF CONDUCTORS | N°5 |
| CONDUCTORS SECTION | 0,34mm ² |
| CABLE MATERIAL | PUR |
| COATING COLOUR | BLACK |
| CONDUCTORS INSULATION MATERIAL | PUR |
| CABLE LENGHT | 2500mm |
| STRIPPING | 35mm STANDARD |
| PEELING AND TINNING | 5mm STANDARD |
| ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5##### | |

| | |
|-------------------------------|------|
| <i>CUSTOMER APPROVAL</i> | |
| SIGNATURE | DATE |
| | |
| <i>PLEASE SIGN AND RETURN</i> | |



| | | | | | | | | | | | |
|----------|-------------|------|------------|-----------|------|--------|----|----------------|-----|------------|-----|
| Designer | SUGLIANI R. | Date | 2017-01-10 | Tolerance | ±0.3 | Units: | mm | Series | M12 | Drawing n. | 1-1 |
| Approved | CIMMINO L. | Date | 2017-01-10 | Scale | 1:1 | Size: | A4 | Customer code: | | | |

| | | |
|--|--|-------------------|
| | DESCRIPTION | H.T.P.PART NUMBER |
| | CIRCULAR CONNECTOR M12,FEMALE,ANGLED 90°,5POLES, WITH CABLE PUR/PUR 5x0.34mm ² ,BLACK COLOUR,L=2,5m CONNECTOR WITH H.T.P.LOGO | 12FA5D2E |