

| CONNECTOR FEATURES | | | | | | | | | | | | |
|---------------------------|------------------|--------|------------------------------|---------------|-------------------|---------------|----------------|--------------|----------------------|--------------------|--------------|--------------|
| CONNECTOR WITH H.T.P.LOGO | PROTECTION CLASS | 0"RING | COUPLING NUT MATERIAL | RATED CURRENT | EXIT CABLE | RATED VOLTAGE | HOUSING COLOUR | HOUSING TYPE | HOUSING MATERIAL | NUMBER OF CONTACTS | CONTACT TYPE | PRODUCT TYPE |
| | IP67 | NBR | BRASS+NICKEL PLATED (CuZnNi) | 4 A | FROM ø4mm TO ø9mm | 250V AC/DC | BLACK | 90° | PA66+15% Fiber glass | 4POLES | FEMALE | M12 TO CABLE |

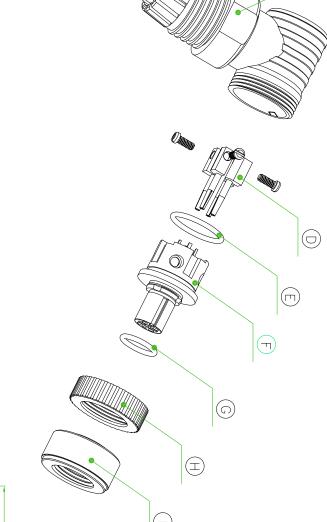


 \triangleright

(13)

 \bigcirc





| | 0-58 | 12FB4000-SK | 12 | HIGH TECH PRODUCTS | | |
|------------|----------|-------------|----------|---|--------------------------------|---|
| |) | | CODICE | H.T.P. | High Tech Products | |
| | | M12 | | M12 CONNECTOR FEMALE 90°,4POLES,TO CABLE EXIT CABLE FROM ø4mm TO ø9mm | M12 CONNECTOR FE EXIT CABLE | |
| MATERIALE | | | TIPO | | DESCRIZIONE | _ |
| | | = | 03.07.12 | CONTROLLATO | U.d.M ANGOLO | |
| DISEGNO N. | <u> </u> | SCALA | DATA | DISEGNATORE LORENZO CIMMINO | TOLLERANZE ±0.2 | |

TOLLERANZE

| _ | I | G | П | Е | 0 | C | B | ⊳ |
|------------------|-------------------------|--------|-------------------|--------|---------------------------|---------------|------------------------|------------------|
| M12 NUT ZN AI/Ni | PLASTIC NUT FOR HOUSING | O-RING | INTERNAL CORE M12 | 0-RING | SCREW CONTACT GOLD PLATED | HOUSING BLACK | GAKET PRESS-CABLE SEAL | PRESS CABLE SREW |