


- C 1
- C 2
- C 3
- C 4

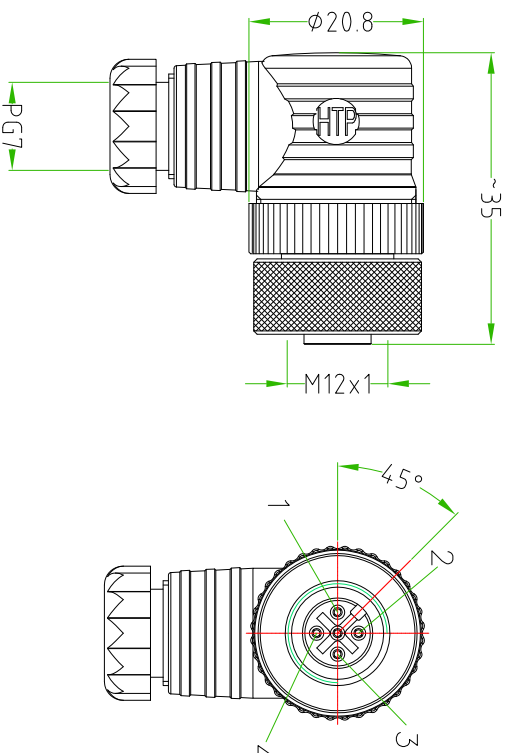

# CONNECTOR FEATURES

PRODUCT TYPE	M12 FIELD ATTACHABLE
CONTACT TYPE	FEMALE(ITO SCREW)
NUMBER OF CONTACTS	4POLES
HOUSING MATERIAL/COLOUR	PA66/BLACK
HOUSING TYPE	90°
COUPLING NUT MATERIAL	BRASS+NICKEL PLATED
O-RING	NBR
EXIT CABLE	PG7
CABLE SUITABLE	FROM Ø4mm TO Ø6mm
CONDUCTOR SIZE	FROM 0,25mm <sup>2</sup> TO 0,75mm <sup>2</sup>
RATED VOLTAGE	250V AC / DC
RATED CURRENT	4A
PROTECTION CLASS	IP65/IP67
TEMPERATURE RANGE	FROM -40°C TO +90°C
CONNECTOR WITH H.T.P. LOGO	

A	PG7 PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M12 A-CODED
H	O-RING
I	PLASTIC NUT FOR HOUSING
J	M12 NUT Brass+nickel plated (CuZnNi)

TOLERANCE		±0.2	DESIGNA TION	DATA	SCALE	PESO	
U&M	ANGLO	CONTR OLLATO	ROBERTO SUGLIANI	02.01.2017	1:1		
DESCRIZIONE M12 FEMALE, ANGLED 90°, 4 POLES BLACK HOUSING, FIELD ATTACHABLE WITH SCREW CONTACTS, PG7. CONNECTOR WITH H.T.P. LOGO				TIPO	M12	MATERIALE	
H.T.P. HIGH TECH PRODUCTS				CODE	12FB4000		