



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved
01	-	2021.04.27	SUGLIANI	CIMMINO

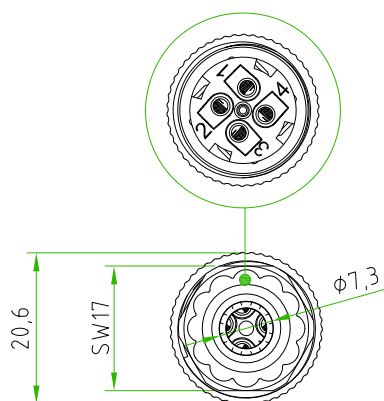

!
ON THE INTERNAL CORE
MUST BE SILK PRINTED
THE CONTACTS NUMBERS

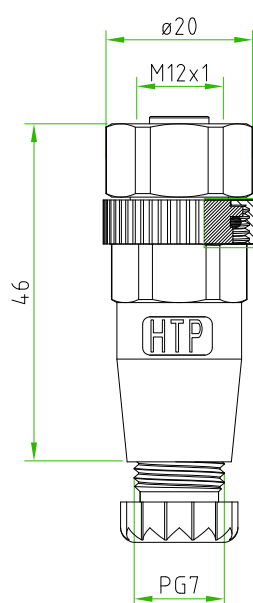

REV.01




CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR FIELD ATTACHABLE
	CONNECTOR TYPE	STRAIGHT 180°
	HOUSING MATERIAL/COLOUR	PA66+30%GF/BLACK
	PRESS-CABLE MATERIAL/COLOUR	PA66/BLACK
	INTERNAL CORE MATERIAL/COLOUR	PA66/BLACK
	M12 EXAGONAL COUPLING NUT MATERIAL	STAINLESS STEEL AISI304
	CONTACTS TYPE	FEMALE SCREW CONTACTS
	NUMBER OF POLES	4POLES(5HOLES)
	CABLE EXIT	PG7
	SUITABLE CABLE	FROM 4mm TO 6mm
	MAX.CONDUCTOR SIZE	0,75mm ² (AWG18)
	PROTECTION CLASS	IP67
	RATED VOLTAGE	250V AC/DC
	RATED CURRENT	4A
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
	CONNECTOR WITH H.T.P. LOGO	
	! PACKAGING: SINGLY PACKED IN THE PLASTIC BAG (PLASTIC BAG WITHOUT ANY LOGO AND LABEL)	

CUSTOMER APPROVAL

SIGNATURE

DATE

**PLEASE SIGN
AND RETURN**

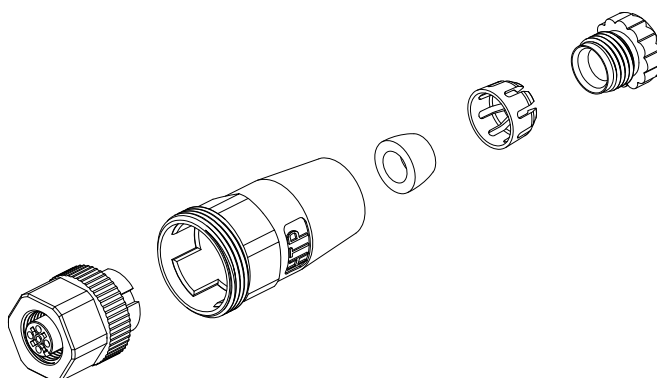

Designer	SUGLIANI R.	Date	2021-04-13	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2021-04-13	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12 FIELD ATTACHABLE, FEMALE, STRAIGHT 180°, 4POLES(5HOLES), PG7 EXIT CABLE WITH STAINLESS STEEL AISI304 NUT. CONNECTOR WITH H.T.P.LOGO

H.T.P.PART NUMBER

12FC4000-INOX