




| | | | | |
|------|--------|------|--------|----------|
| Rev. | Modify | Date | Signed | Approved |
| | | | | |
| Rev. | Modify | Date | Signed | Approved |
| | | | | |
| Rev. | Modify | Date | Signed | Approved |
| | | | | |



- 1) BROWN
- 3) BLUE
- 4) BLACK

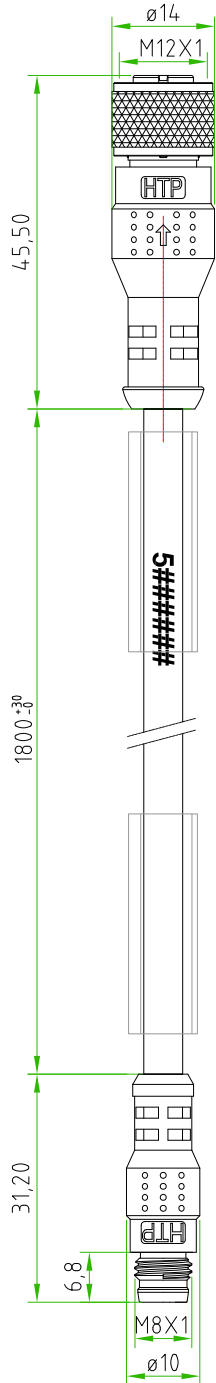

| | | | |
|----------------------------|--|---|--|
| CONNECTOR FEATURES | PRODUCT TYPE | EXTENSION M12-M8 CIRCULAR CONNECTORS WITH MOULDED CABLE | |
| | M12 CONNECTOR TYPE | STRAIGHT 180° FEMALE 3POLES | |
| | M8 CONNECTOR TYPE | STRAIGHT 180° WITH FIXED NUT MALE 3POLES | |
| | NUMBER OF CONTACTS CONNECTED | N°3 | |
| | PROTECTION CLASS | IP69K | |
| | RATED VOLTAGE | 50V AC / 60V DC | |
| | RATED CURRENT | 3A | |
| CONNECTORS WITH H.T.P.LOGO | | | |
| CABLE FEATURES | H.T.P.CABLE CODE | CAVO C-3-IS USE THE CABLE CAVO-31-K6-IS | |
| | NUMBER OF CONDUCTORS | N°3 | |
| | CONDUCTORS SECTION | 0,25mm ² (AWG 24) | |
| | CABLE MATERIAL | PUR ULstyle21576 | |
| | COATING COLOUR | BLACK | |
| | CONDUCTORS INSULATION MATERIAL | TPO | |
| | CABLE LENGHT | 1800mm | |
| | | HIGH FLEX (CLASS 6) | |
| | CABLE PROVIDED BY H.T.P. ITALY | | |
| | ON THE CABLE,NEAR THE CONNECTOR HEAD,MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5##### | | |
| | ON THE CABLE MUST BE APPLIED N°2 HOLDERS FOR CABLE MARKING. | | |

CUSTOMER APPROVAL

| | |
|-----------|------|
| SIGNATURE | DATE |
| | |

PLEASE SIGN AND RETURN

| | | | | | | | | | | |
|----------|-------------|------|------------|-----------|------|--------|----|----------------|--------|-------------------|
| Designer | SUGLIANI R. | Date | 2017-03-24 | Tolerance | ±0.3 | Units: | mm | Series | M12-M8 | Drawing n. 1-1 |
| Approved | CIMMINO L. | Date | 2017-03-24 | Scale | 1:1 | Size: | A4 | Customer code: | | |

DESCRIPTION
 EXTENSION CIRCULAR CONNECTORS M12,FEMALE,STRAIGHT 180°,3POLES+M8 WITH FIXED NUT, MALE,STRAIGHT 180°,3POLES,WITH CABLE PUR/TPO, 3x0,25mm²,BLACK COLOUR,HIGH FLEX,ULstyle21576,L=1,8m. CONNECTORS WITH H.T.P.LOGO

H.T.P.PART NUMBER
 12FD3C1H08MW-K6-IS



A4

