



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved


Rev.	Modify	Date	Signed	Approved

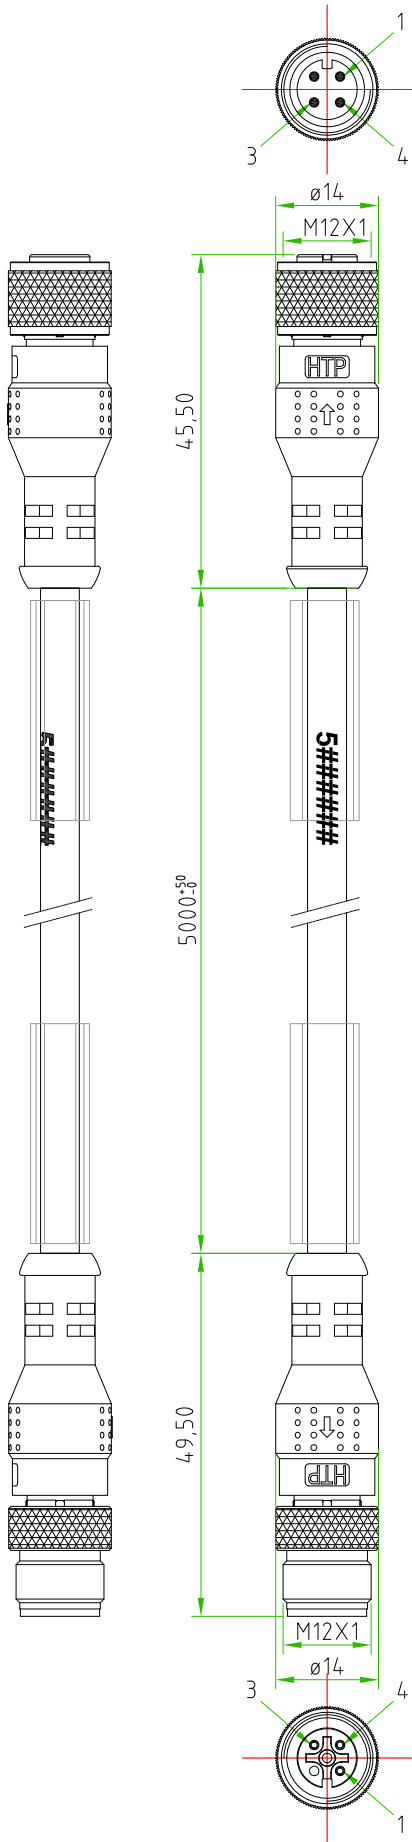

CONNECTOR FEATURES	PRODUCT TYPE	EXTENSION M12-M12 CIRCULAR CONNECTORS WITH MOULDED CABLE	
	M12 CONNECTOR TYPE	STRAIGHT 180° FEMALE 3POLES	
	M12 CONNECTOR TYPE	STRAIGHT 180° MALE 3POLES	
	NUMBER OF CONTACTS CONNECTED	N°3	
	PROTECTION CLASS	IP69K	
	RATED VOLTAGE	250V AC/DC	
	RATED CURRENT	4A	
CONNECTORS WITH H.T.P.LOGO			
CABLE FEATURES	H.T.P.CABLE CODE	CAVO C-3-K6-IS USE THE CABLE 31-3-K6-IS	
	NUMBER OF CONDUCTORS	N°3	
	CONDUCTORS SECTION	24AWG (0,25mm ²)	
	CABLE MATERIAL	PUR ULstyle21576 Us	
	COATING COLOUR	BLACK	
	CONDUCTORS INSULATION MATERIAL	TPO	
	CABLE LENGHT	5000mm	
	HIGH FLEX (CLASS 6)		
	CABLE PROVIDED BY H.T.P.srl		
	ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		
ON THE CABLE MUST BE APPLIED N°2 HOLDERS FOR CABLE MARKING.			

CUSTOMER APPROVAL

<i>SIGNATURE</i>	<i>DATE</i>
<i>PLEASE SIGN AND RETURN</i>	



Designer CIMMINO L.	Date 2018-03-27	Tolerance ±0.3	Units: mm	Series M12	Drawing n. 1-1
Approved MAZZOLA M.	Date 2018-03-27	Scale 1:1	Size: A4	Customer code:	

	DESCRIPTION EXTENSION CIRCULAR CONNECTORS M12, FEMALE, STRAIGHT 180°, 3POLES+M12 MALE, STRAIGHT 180°, 3POLES, WITH CABLE PUR/TPO ULstyle21576, 3x0,25mm ² , HIGH FLEX, BLACK COLOUR, L=5m. CONNECTORS WITH H.T.P.LOGO	H.T.P.PART NUMBER 12FD3C5Z12MD-K6-IS
--	--	--