



| | | | | |
|------|--------|------|--------|----------|
| Rev. | Modify | Date | Signed | Approved |
| | | | | |
| Rev. | Modify | Date | Signed | Approved |
| | | | | |
| Rev. | Modify | Date | Signed | Approved |
| | | | | |

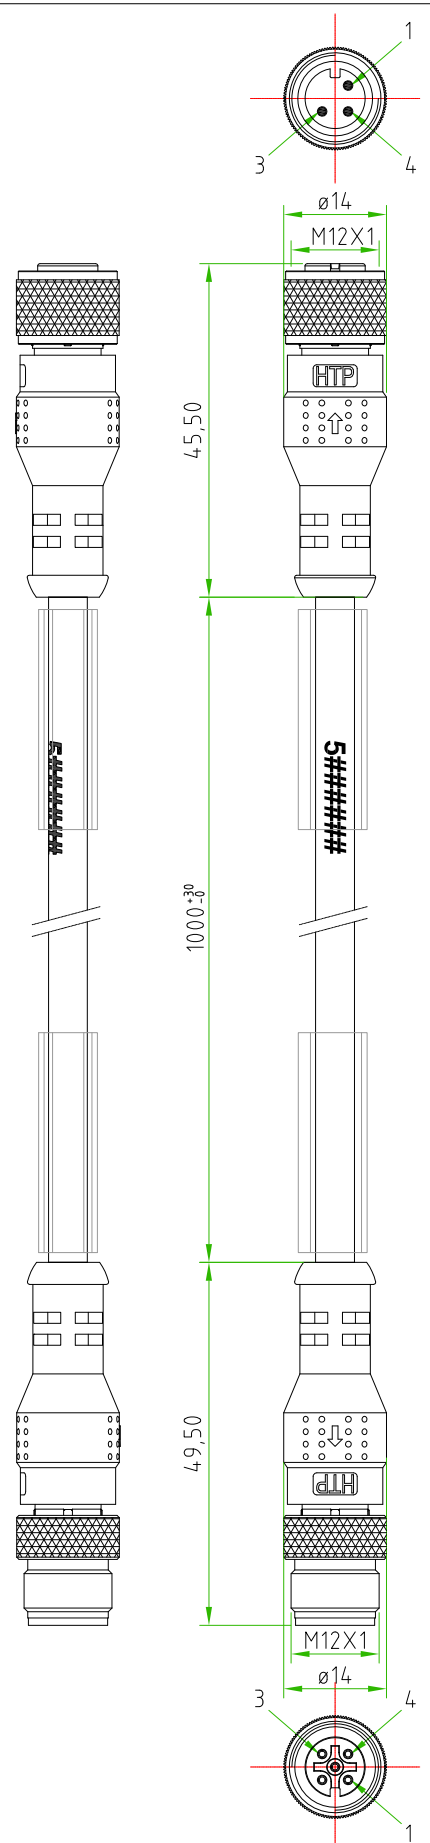

| | | |
|--|--------------------------------|--|
| CONNECTOR FEATURES | PRODUCT TYPE | EXTENSION M12-M12 CIRCULAR CONNECTORS WITH MOULDED CABLE |
| | M12 CONNECTOR TYPE | STRAIGHT 180° FEMALE 3POLES |
| | M12 CONNECTOR TYPE | STRAIGHT 180° MALE 3POLES |
| | NUMBER OF CONTACTS CONNECTED | N°3 |
| | PROTECTION CLASS | IP69K |
| | RATED VOLTAGE | 250V AC/DC |
| CABLE FEATURES | RATED CURRENT | 4 A |
| | CONNECTORS WITH H.T.P.LOGO | |
| | H.T.P.CABLE CODE | CAVO D-3-K6-IS USE THE CABLE 29-3-K6-IS |
| | NUMBER OF CONDUCTORS | N°3 |
| | CONDUCTORS SECTION | 22AWG (0,34mm ²) |
| | CABLE MATERIAL | PUR ULstyle21576 |
| | COATING COLOUR | BLACK |
| | CONDUCTORS INSULATION MATERIAL | TPO |
| | CABLE LENGHT | 1000mm |
| | HIGH FLEX (CLASS 6) | |
| CABLE PROVIDED BY H.T.P.srl | | |
| ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5##### | | |
| ON THE CABLE MUST BE APPLIED N°2 HOLDERS FOR CABLE MARKING. | | |

CUSTOMER APPROVAL

| | |
|-----------|------|
| SIGNATURE | DATE |
| | |

PLEASE SIGN AND RETURN

| | | | | | | |
|-----------|----------------------|-----------------|----------------|-----------|----------------|----------------|
| A4 | Designer SUGLIANI R. | Date 2019-06-03 | Tolerance ±0.3 | Units: mm | Series M12 | Drawing n. 1-1 |
| | Approved CIMMINO L. | Date 2019-06-03 | Scale 1:1 | Size: A4 | Customer code: | |

DESCRIPTION

EXTENSION CIRCULAR CONNECTORS M12, FEMALE, STRAIGHT 180°, 3POLES + M12 MALE, STRAIGHT 180°, 3POLES, WITH CABLE PUR/TPO ULstyle21576, 3x0,34mm², HIGH FLEX, BLACK COLOUR, L=1m. CONNECTORS WITH H.T.P.LOGO

H.T.P.PART NUMBER

12FD3D1Z12MD-K6-IS