

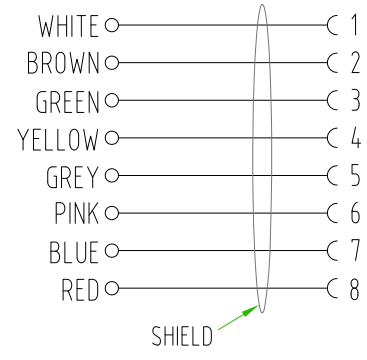


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved

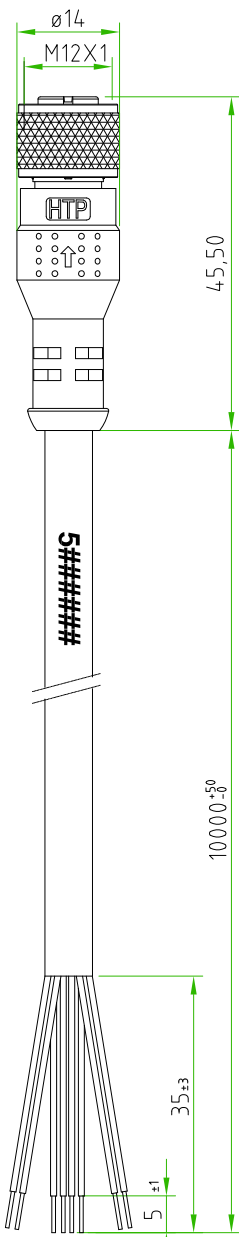

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
	CONNECTOR TYPE	STRAIGHT 180°
	CONTACTS TYPE	FEMALE 8POLES
	NUMBER OF CONTACTS CONNECTED	N°8
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	30V AC/DC
	RATED CURRENT	2A
CONNECTOR WITH H.T.P.LOGO		
CABLE FEATURES	H.T.P.CABLE CODE	CAVO 48-8-IS
	NUMBER OF CONDUCTORS	N°8
	CONDUCTORS SECTION	0,25mm <sup>2</sup> (24AWG)
	CABLE MATERIAL	PUR UL style 21576 c
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	TPO
	CABLE LENGHT	10000mm
STRIPPING	35mm STANDARD	
PEELING AND TINNING	5mm STANDARD	
CABLE PROVIDED BY H.T.P.srl		
	CABLE SHIELDED	
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		



*CUSTOMER APPROVAL*

SIGNATURE	DATE

*PLEASE SIGN AND RETURN*

A4

Designer	CIMMINO L.	Date	2015-07-16	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n.
Approved	MAZZOLA M.	Date	2015-07-16	Scale	1:1	Size:	A4	Customer code:		

	DESCRIPTION	H.T.P.PART NUMBER
	CIRCULAR CONNECTOR M12,FEMALE,STRAIGHT 180°,8POLES, WITH CABLE PUR ULstyle 21576, 8x0.25mm <sup>2</sup> ,SHIELDED,BLACK COLOUR,L=10m,CONNECTOR WITH H.T.P.LOGO	12FD84810-IS