
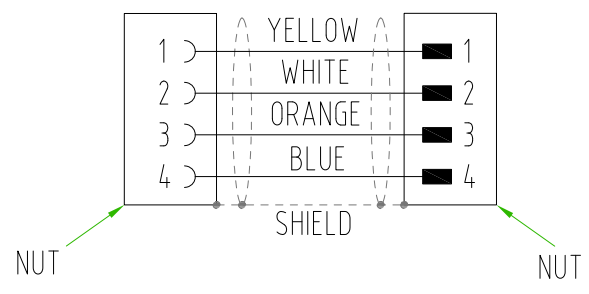


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved

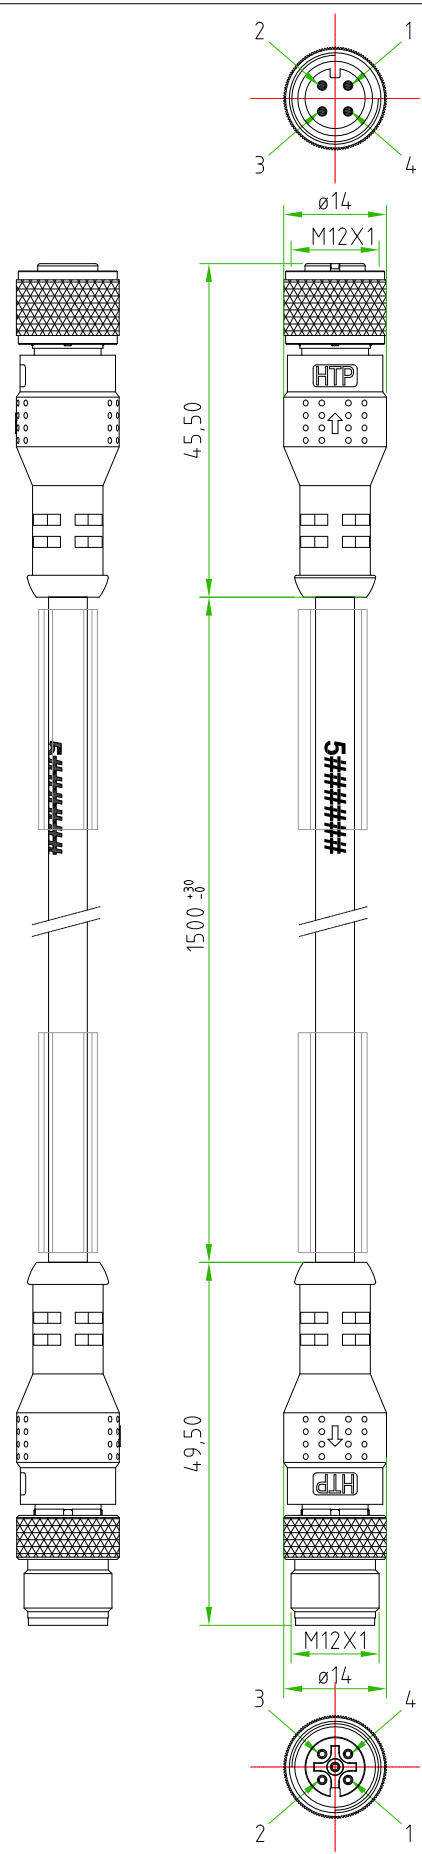

CONNECTOR FEATURES	PRODUCT TYPE	EXTENSION M12-M12 CIRCULAR CONNECTORS WITH MOULDED CABLE
	M12 CONNECTOR TYPE	STRAIGHT 180° FEMALE 4POLES
	M12 CONNECTOR TYPE	STRAIGHT 180° MALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	250V AC/DC
RATED CURRENT	4A	
CONNECTORS WITH H.T.P. LOGO		
! TOTALLY SHIELDED CONNECTORS THE SHIELD MUST BE CONNECTED TO BOTH M12 NUTS		
CABLE FEATURES	H.T.P. CABLE CODE	CAVO 40 - 4 - K6 - IS
	NUMBER OF CONDUCTORS	N°4
	CONDUCTORS SECTION	AWG22 (0.34mm ²)
	CABLE MATERIAL	PUR ULstyle 21576 BUS CAT.5E
	COATING COLOUR	GREEN RAL6018
	CONDUCTORS INSULATION MATERIAL	TPE
	CABLE LENGTH	1500mm
	CABLE SHIELDED	HIGH FLEX (CLASS 6)
	CABLE PROVIDED BY H.T.P. Italy	
	ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	
! ON THE CABLE MUST BE APPLIED N°2 HOLDERS FOR CABLE MARKING.		

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

A4	Designer	SUGLIANI R.	Date	2018-02-06	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
	Approved	CIMMINO L.	Date	2018-02-06	Scale	1:1	Size:	A4	Customer code:		

	DESCRIPTION	EXTENSION CIRCULAR CONNECTORS M12,FEMALE,STRAIGHT 180°,4POLES, TOTALLY SHILED+M12 MALE,STRAIGHT 180°,4POLES,TOTALLY SHIELDED, WITH CABLE PUR ULstyle 21576,1X4XAWG22,GREEN COLOUR RAL6018,BUS,CAT.5E, SHIELDED,L=1,5m. CONNECTORS WITH H.T.P. LOGO	H.T.P.PART NUMBER