
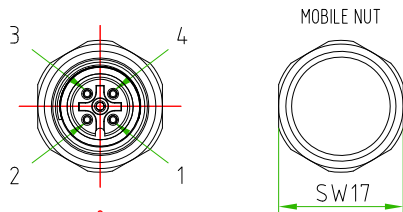


Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved


Rev.	Modify	Date	Signed	Approved

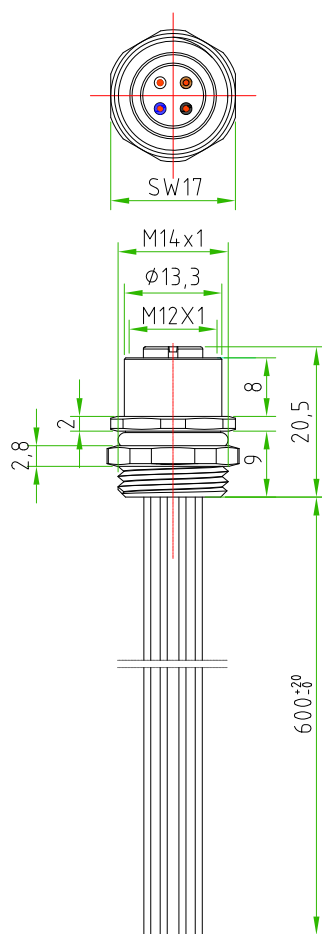

PAY ATTENTION to the position of the polarization key towards the exagonal fixing nut.

BROWN ○ ————— C 1
 WHITE ○ ————— C 2
 BLUE ○ ————— C 3
 BLACK ○ ————— C 4

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	FEMALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	HOUSING MATERIAL	BRASS+NICKEL PLATED
	O-RING MATERIAL	NBR
	FIXING THREAD	M14x1
	SIZE FIXED NUT(SW)	SW17
	SIZE MOBILE NUT(SW)	SW17
	PROTECTION CLASS	IP67
	RATED VOLTAGE	250V AC/DC
	RATED CURRENT	4A
WIRES FEATURES	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	N°4
	CONDUCTORS SECTION	0,34mm ²
	CONDUCTORS INSULATION MATERIAL	PVC
	CONDUCTORS LENGHT	600mm

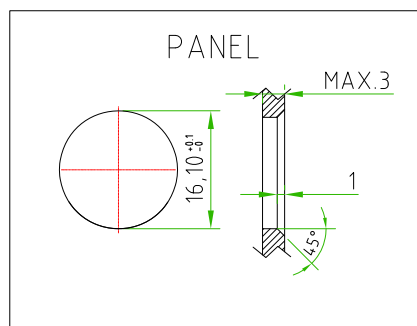

CUSTOMER APPROVAL

SIGNATURE DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2017-03-20	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2017-03-20	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12,FEMALE,TO PANEL,4POLES,FRONTAL MOUNTING, M14x1 THREAD,WITH N°4 WIRES PVC 0,34mm² L=600mm .
 CONNECTOR WITHOUT ANY LOGO

H.T.P.PART NUMBER

12FP4B0F-M14