




Approved		
Signed		
Date		
Modify		
Rev.		

Approved		
Signed		
Date		
Modify		
Rev.		

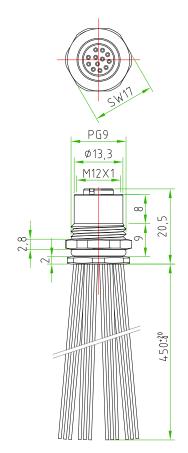




PAY ATTENTION to the position of the polarization key towards the CUT and the exagonal fixed nut.



	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH WIRES.	
	TYPE MOUNTING	BACK MOUNTING	
	CONTACTS TYPE	FEMALE 12POLES	
	NUMBER OF CONTACTS CONNECTED	N°12	
CONNECTOR FEATURES	HOUSING MATERIAL	BRASS+NICKEL PLATED	
	O-RING MATERIAL	NBR	
	FIXING THREAD	PG9	
	SIZE CUT	13,30mm (+0,1/-0)	
	SIZE FIXED NUT(SW)	SW17	
	SIZE MOBILE NUT(SW)	SW17	
ľ	PROTECTION CLASS	IP67	
-	RATED VOLTAGE	30V AC/DC	
	RATED CURRENT	1,5A	
	CONNECTOR WITHOUT ANY LOGO		
TURES	NUMBER OF CONDUCTORS	N°12	
S FEA	CONDUCTORS SECTION	0,14mm²	
	CONDUCTORS INSULATION MATERIAL	PVC	
WIRE	CONDUCTORS LENGHT	450mm	



Units:

Size:

Series

M12

Customer code:

CUSTOMER	APPROVAL		
SIGNATURE	DATE		
PLEASE SIGN			
AND RETURN			





Designer

Approved

SUGLIANI R.

CIMMINO L.

DESCRIPTION

Date 2021-08-03

Date 2021-08-03

CIRCULAR CONNECTOR M12, FEMALE, TO PANEL, 12POLES, BACK MOUNTING, PG9 THREAD, COMPLETE WITH CUT WITH N°12 WIRES PVC 0,14mm² L=450mm CONNECTOR WITHOUT ANY LOGO

1:1

Tollerance ±0.3

Scale

H.T.P.PART NUMBER

12FR12K0D5-PG9-CUT

Д4

Drawing n.

1-1