


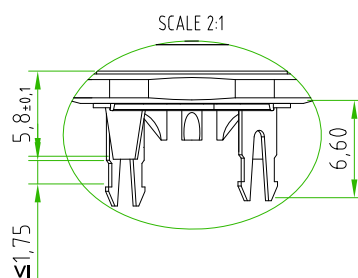
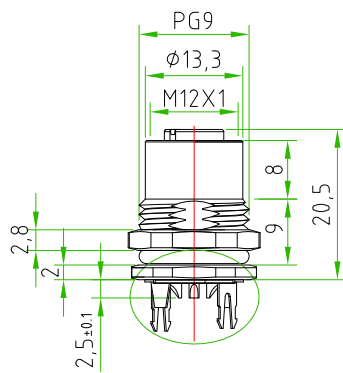



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

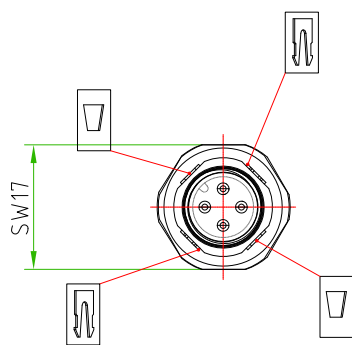



PAY ATTENTION to the position of the polarization key towards the CUT and the exagonal fixing nut.



CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH CONTACTS FOR SOLDERED WIRES.
	TYPE MOUNTING	BACK MOUNTING
	CONTACTS TYPE	FEMALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	HOUSING MATERIAL	BRASS+NICKEL PLATED
	O-RING MATERIAL	NBR
	FIXING THREAD	PG9
	SIZE CUT	13,30mm (+0,1/-0)
	SIZE FIXED NUT(SW)	SW17
	SIZE MOBILE NUT(SW)	SW17
	PROTECTION CLASS	IP67
	RATED VOLTAGE	250V AC/DC
	RATED CURRENT	4A
	CONNECTOR WITHOUT ANY LOGO	



PAY ATTENTION:
THE METAL SHEET WILL BE PROVIDED BY NDT CODE:
12-METALSHEET-SH

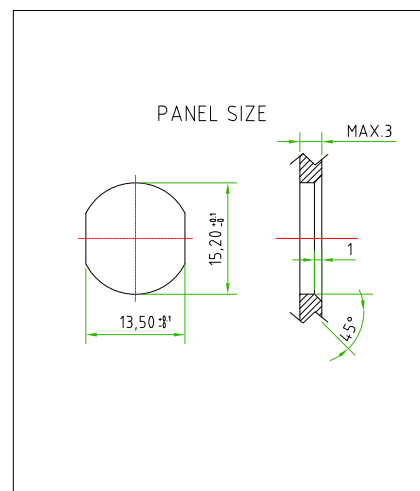

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN
AND RETURN

A4

Designer	SUGLIANI R.	Date	2017-11-21	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2017-11-21	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12,FEMALE,TO PANEL,4POLES,BACK MOUNTING, COMPLETE WITH CUT, PG9 THREAD,WITH N°4 CONTACTS FOR SOLDERED WIRES CONNECTOR WITHOUT ANY LOGO

H.T.P.PART NUMBER

12FR4000-PG9-CUT-SH