

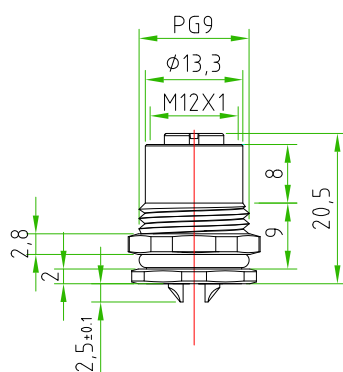



Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved


A4



PAY ATTENTION to the position of the polarization key towards the exagonal fixing nut.



CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH CONTACTS FOR SOLDERED WIRES.
	TYPE MOUNTING	BACK MOUNTING
	CONTACTS TYPE	FEMALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	HOUSING MATERIAL	STAINLESS STEEL (AISI304)
	O-RING MATERIAL	NBR
	FIXING THREAD	PG9
	SIZE FIXED NUT(SW)	SW17
	SIZE MOBILE NUT(SW)	SW17
	PROTECTION CLASS	IP67
	RATED VOLTAGE	250V AC/DC
	RATED CURRENT	4A
	CONNECTOR WITHOUT ANY LOGO	

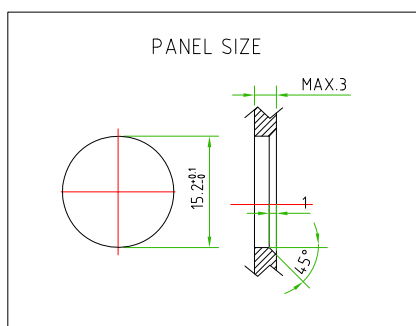

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2016-08-04	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2016-08-04	Scale	1:1	Size:	A4	Customer code:		



#### DESCRIPTION

CIRCULAR CONNECTOR M12,FEMALE,TO PANEL,4POLES,BACK MOUNTING, PG9 THREAD,WITH N°4 CONTACTS FOR SOLDERED WIRES, CONNECTOR IN STAINLESS STEEL(AISI304). CONNECTOR WITHOUT ANY LOGO

H.T.P.PART NUMBER

12FR4000-PG9-INOX