




Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved
01	-	2019-05-27	CIMMINO L.	SUGLIANI R.
02	-	2021-05-06	SUGLIANI R.	CIMMINO L.



!
ON THE INTERNAL CORE
MUST BE SILK PRINTED
THE CONTACTS NUMBERS

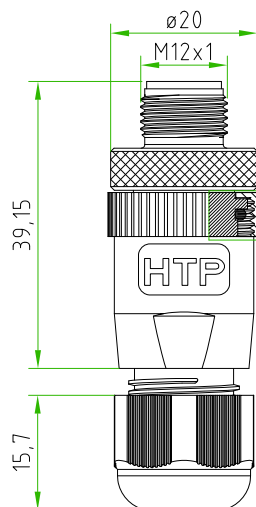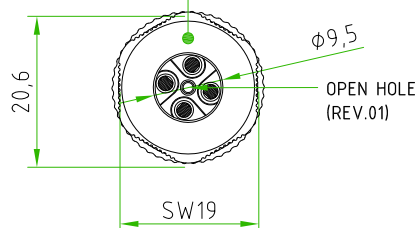

REV.02




!
OPEN HOLE
(REV.01)

CUSTOMER APPROVAL


SIGNATURE

DATE

**PLEASE SIGN
AND RETURN**

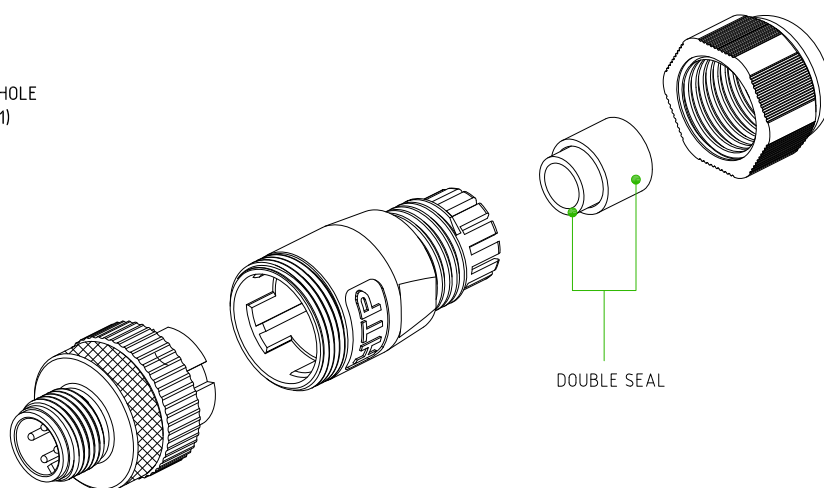

DOUBLE SEAL

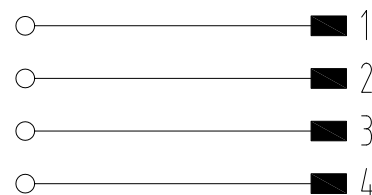

PRODUCT TYPE	M12 CIRCULAR CONNECTOR FIELD ATTACHABLE
CONNECTOR TYPE	STRAIGHT 180°
HOUSING MATERIAL/COLOUR	PA66+30%GF/BLACK
PRESS-CABLE MATERIAL/COLOUR	PA66/BLACK
INTERNAL CORE MATERIAL/COLOUR	PA66/BLACK
M12 COUPLING NUT MATERIAL	BRASS + NICKEL PLATED
CONTACTS TYPE	MALE SCREW CONTACTS
NUMBER OF POLES	4POLES (5HOLES <u>REV.01</u>)
CABLE EXIT	SK
SUITABLE CABLE	FROM ø4mm TO ø8.6mm
MAX.CONDUCTOR SIZE	0,75mm ² (AWG18)
PROTECTION CLASS	IP67
RATED VOLTAGE	250V AC/DC
RATED CURRENT	4A
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
DOUBLE SEAL MATERIAL	PVC
CONNECTOR WITH H.T.P. LOGO	
! PACKAGING: SINGLY PACKED IN THE PLASTIC BAG (PLASTIC BAG WITHOUT ANY LOGO AND LABEL)	

Designer	SUGLIANI R.	Date	2018-08-09	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2018-08-09	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12 FIELD ATTACHABLE, MALE, STRAIGHT 180°,
4POLES(5HOLES), EXIT CABLE FROM ø4mm TO ø8.6mm
CONNECTOR WITH H.T.P.LOGO

H.T.P.PART NUMBER

12MC4000-SK