



Rev.	Modify	Date	Signed	Approved

- BROWN ————— 1
- BLUE ————— 3
- BLACK ————— 4

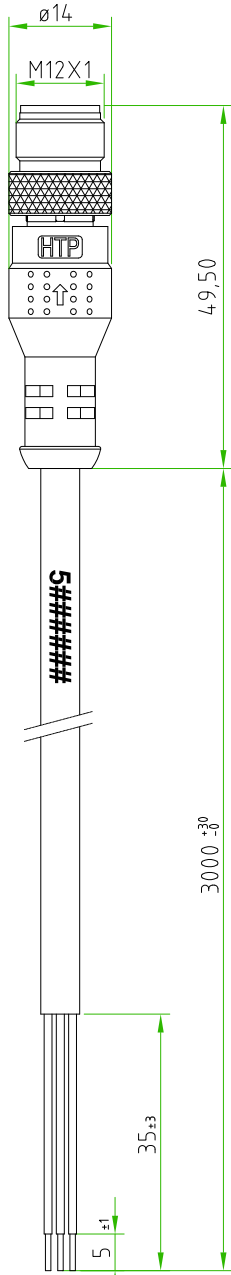

CONNECTOR FEATURES		PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE		
		CONNECTOR TYPE	STRAIGHT 180°		
		CONTACTS TYPE	MALE 3POLES		
		NUMBER OF CONTACTS CONNECTED	N°3		
		PROTECTION CLASS	IP69K		
		RATED VOLTAGE	250V AC/DC		
		RATED CURRENT	4A		
		CONNECTOR WITH H.T.P.LOGO			
		CABLE FEATURES		H.T.P.CABLE CODE	CAVO C-3-K6-R
				NUMBER OF CONDUCTORS	N°3
CONDUCTORS SECTION	0,25mm ² (AWG 24)				
CABLE MATERIAL	PUR ULstyle21576				
COATING COLOUR	BLACK				
CONDUCTORS INSULATION MATERIAL	TPO				
CABLE LENGHT	3000mm				
STRIPPING	35mm STANDARD				
PEELING AND TINNING	5mm STANDARD				
HIGH FLEX (CLASS 6)					
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE #####					

CUSTOMER APPROVAL

SIGNATURE	DATE
PLEASE SIGN AND RETURN	



Designer	SUGLIANI R.	Date	2019-09-09	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n.	1-1
Approved	CIMMINO L.	Date	2019-09-09	Scale	1:1	Size:	A4	Customer code:			
										<p style="color: red; font-weight: bold;">H.T.P.PART NUMBER</p> <p style="font-size: 1.5em;">12MD3C3Z-K6-IS</p>	
<p style="color: red; font-weight: bold;">DESCRIPTION</p> <p>CIRCULAR CONNECTOR M12, MALE, STRAIGHT 180°, 3POLES, WITH CABLE PUR ULstyle21576, HIGH FLEX, 3x0.25mm², BLACK COLOUR L=3m, CONNECTOR WITH H.T.P.LOGO</p>											