



Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved

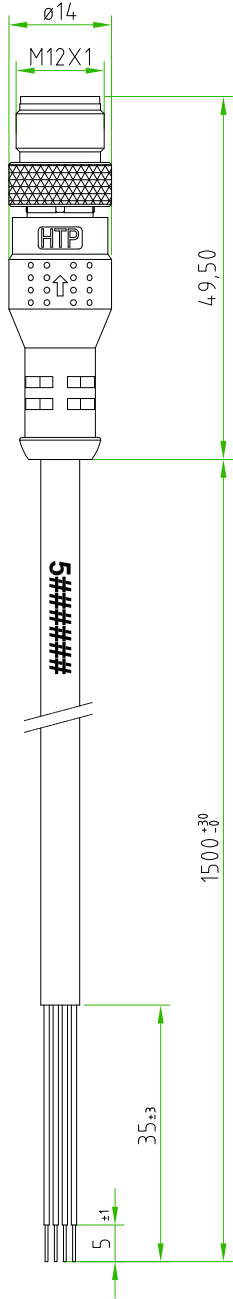

- BROWN ○ ————— ■ 1
- WHITE ○ ————— ■ 2
- BLUE ○ ————— ■ 3
- BLACK ○ ————— ■ 4

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
	CONNECTOR TYPE	STRAIGHT 180°
	CONTACTS TYPE	MALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	250V AC/DC
	RATED CURRENT	4A
	CONNECTOR WITH H.T.P.LOGO	
CABLE FEATURES	H.T.P.CABLE CODE	CAVO D-4-K6-IS USE THE CABLE CAVO 29-4-K6-IS
	NUMBER OF CONDUCTORS	N°4
	CONDUCTORS SECTION	0,34mm <sup>2</sup> (AWG22)
	CABLE MATERIAL	PUR ULstyle21576
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	TPO
	CABLE LENGHT	1500mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
	HIGH FLEX (CLASS 6)	
CABLE PROVIDED BY H.T.P. ITALY		
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		

*CUSTOMER APPROVAL*

SIGNATURE	DATE

*PLEASE SIGN AND RETURN*

Designer	CIMMINO L.	Date	2016-02-16	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n.
Approved	MAZZOLA M.	Date	2016-02-16	Scale	1:1	Size:	A4	Customer code:		1-1

A4

	<b>DESCRIPTION</b> CIRCULAR CONNECTOR M12, MALE, STRAIGHT 180°, 4POLES, WITH CABLE PUR/TPO ULstyle21576, 4x0.34mm <sup>2</sup> , BLACK COLOUR, HIGH FLEX, L=1,5m, CONNECTOR WITH H.T.P. LOGO	<b>H.T.P. PART NUMBER</b> <span style="font-size: 1.2em; border-bottom: 1px solid black; display: inline-block; width: 150px;">12MD4D1E-K6-IS</span>
--	---	---