




Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

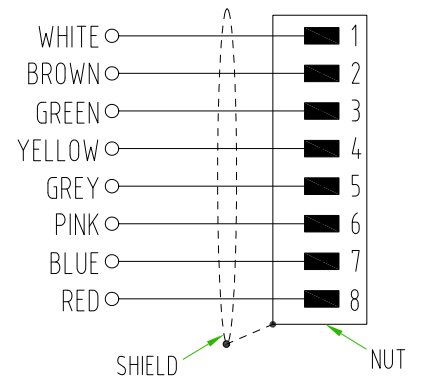

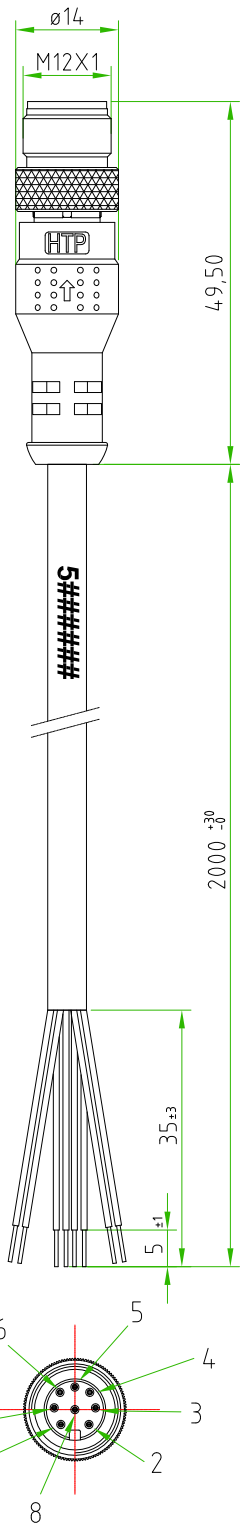

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
	CONNECTOR TYPE	STRAIGHT 180°
	CONTACTS TYPE	MALE 8POLES
	NUMBER OF CONTACTS CONNECTED	N°8
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	30V AC/DC
	RATED CURRENT	2A
	TOTALLY SHIELDED CONNECTOR (SHIELD CONNECTED TO THE NUT)	
	CONNECTOR WITH H.T.P.LOGO	
	CABLE FEATURES	H.T.P.CABLE CODE
NUMBER OF CONDUCTORS		N°8
CONDUCTORS SECTION		0,25mm <sup>2</sup>
CABLE MATERIAL		PUR
COATING COLOUR		BLACK
CONDUCTORS INSULATION MATERIAL		TPO
CABLE LENGTH		2000mm
STRIPPING		35mm STANDARD
PEELING AND TINNING		5mm STANDARD
 CABLE SHIELDED		
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE #####5		

*CUSTOMER APPROVAL*

<i>SIGNATURE</i>	<i>DATE</i>

*PLEASE SIGN AND RETURN*

A4

Designer	CIMMINO L.	Date	2019-06-19	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n.	1-1		
Approved	SUGLIANI R.	Date	2019-06-19	Scale	1:1	Size:	A4	Customer code:					
 										DESCRIPTION CIRCULAR CONNECTOR M12, MALE, STRAIGHT 180°, 8POLES, TOTALLY SHIELDED, WITH CABLE PUR/TPO, UL style 21576, 8x0.25mm <sup>2</sup> , BLACK COLOUR, SHIELDED, L=2m. CONNECTOR WITH H.T.P.LOGO		H.T.P.PART NUMBER 12MJ8482Z	