


CONNECTOR FEATURES

PRODUCT TYPE	M12 FIELD ATTACHABLE
CONTACT TYPE	MALE (TO SCREW)
NUMBER OF CONTACTS	4 POLES
HOUSING MATERIAL / COLOUR	PA66 / BLACK
HOUSING TYPE	180°
COUPLING NUT MATERIAL	BRASS+NICKEL PLATED
O-RING	NBR
EXIT CABLE	PG9/11 UNIFIED / DOUBLE EXIT
CABLE SUITABLE	SINGLE EXIT: FROM Ø6mm TO Ø11mm DOUBLE EXIT: 6 MAX
CONDUCTOR SIZE	FROM 0,25mm ² TO 0,75mm ²
RATED VOLTAGE	250V AC / DC
RATED CURRENT	4A
PROTECTION CLASS	IP65/IP67
TEMPERATURE RANGE	FROM -40°C TO +90°C
CONNECTOR WITH H.T.P. LOGO	

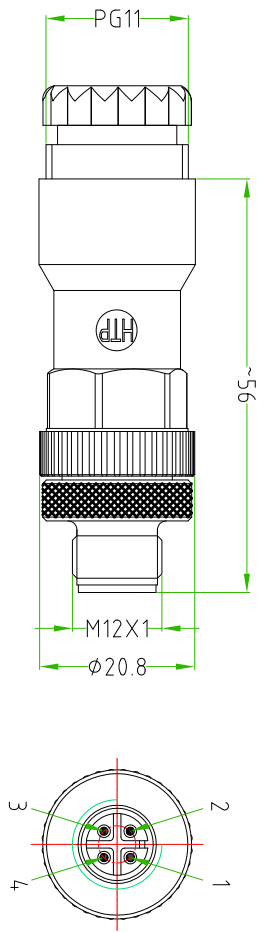

A PRESS CABLE SREW
B LAMELLAE PRESS-CABLE SEAL
C GASKET WITH DOUBLE EXIT + METAL WASHER
D GASKET PRESS-CABLE SEAL PG9/PG11
E HOUSING BLACK
F SCREW CONTACT GOLD PLATED
G O-RING
H INTERNAL CORE M12
I PLASTIC NUT FOR HOUSING
J M12 NUT BRASS+NICKEL PLATED

TOLLERANZE	±0,2	DISEGNATORE	ROBERTO SUGLIANI	DATA	02.01.2017	SCALE	1:1	DISEGNO N.	
UDM	ANGOLO	CONTROLLATO	LORENZO CHINNO						
DESCRIZIONE	M12 MALE 180° 4 POLES EXIT CABLE PG9/11, FIELD ATTACHABLE CONNECTOR WITH H.T.P. LOGO.				TP90	M12		MATERIALE	
H.T.P. HIGH TECH PRODUCTS				CODE	12ML4000				