


- 1
- 2
- 3
- 4
- 5


CONNECTOR FEATURES

PRODUCT TYPE	M12 FIELD ATTACHABLE
CONTACT TYPE	MALE(10 SCREW)
NUMBER OF CONTACTS	5POLES
HOUSING MATERIAL/COLOUR	PA66/BLACK
HOUSING TYPE	180°
COUPLING NUT MATERIAL	BRASS+NICKEL PLATED
O-RING	NBR
EXIT CABLE	PG9/11 UNIFIED/DOUBLE EXIT
CABLE SUITABLE	SINGLE EXIT: FROM ø6mm TO ø11mm DOUBLE EXIT: 6 MAX
CONDUCTOR SIZE	FROM 0,25mm ² TO 0,75mm ²
RATED VOLTAGE	60V AC / DC
RATED CURRENT	4A
PROTECTION CLASS	IP65/IP67
TEMPERATURE RANGE	FROM -40°C TO +90°C
CONNECTOR WITH H.T.P. LOGO	

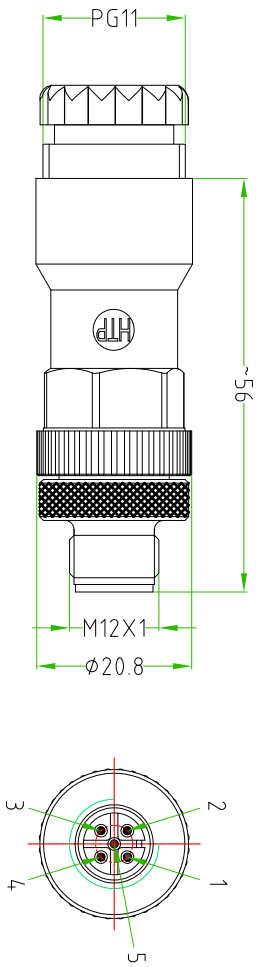

A PRESS CABLE SREW
B LAMELLE PRESS-CABLE SEAL
C GASKET WITH DOUBLE EXIT + METAL WASHER
D GASKET PRESS-CABLE SEAL PG9/PG11
E HOUSING BLACK
F SCREW CONTACT GOLD PLATED
G O-RING
H INTERNAL CORE M12
I PLASTIC NUT FOR HOUSING
J M12 NUT BRASS+NICKEL PLATED

TOLLERANZE	±0,2	DISIGNATORE	LORENZO CHINNO	DATA	02.01.17	SCALA	1:1	DISIGNO N.
UDM	ANGOLO	CONTROLLATO	ROBERTO SUGLIANI					
DESCRIZIONE	M12 MALE 180° 5 POLES EXIT CABLE PG9/11, FIELD ATTACHABLE. CONNECTOR WITH H.T.P. LOGO.			TP90	M12	MATERIALE		



H.T.P. HIGH TECH PRODUCTS

12ML5000