



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved


Rev.	Modify	Date	Signed	Approved

BROWN ○ ——— ■ 1
 WHITE ○ ——— ■ 2
 BLUE ○ ——— ■ 3
 BLACK ○ ——— ■ 4
 GREY ○ ——— ■ 5

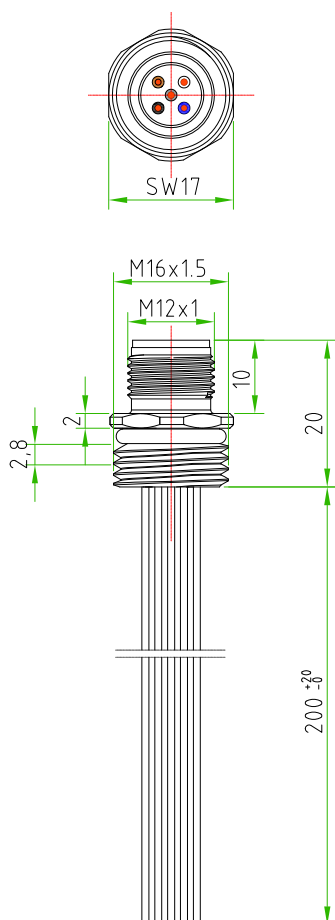

PAY ATTENTION to the position of the polarization key towards the exagonal fixing nut.

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 5POLES
	NUMBER OF CONTACTS CONNECTED	N°5
	HOUSING MATERIAL	STAINLESS STEEL AISI316L
	O-RING MATERIAL	NBR
	FIXING THREAD	M16X1.5
	SIZE FIXED NUT(SW)	SW17
	SIZE MOBILE NUT(SW)	WITHOUT MOBILE NUT
	PROTECTION CLASS	IP67
WIRES FEATURES	RATED VOLTAGE	60V AC/DC
	RATED CURRENT	4 A
	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	N°5
	CONDUCTORS SECTION	0,25mm ²
	CONDUCTORS INSULATION MATERIAL	PVC
	CONDUCTORS LENGHT	200mm

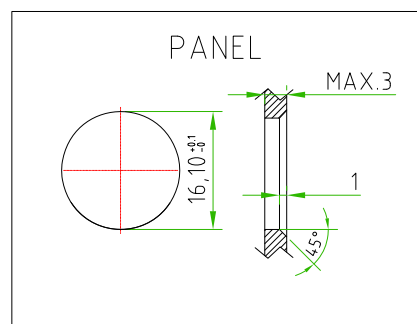

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2021-09-27	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2021-09-27	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12,MALE,TO PANEL,5POLES,FRONTAL MOUNTING, M16x1.5 THREAD, IN STAINLESS STEEL AISI316L, WITH N°5 WIRES PVC 0,25mm² L=200mm, WITHOUT MOBILE NUT. CONNECTOR WITHOUT ANY LOGO

H.T.P.PART NUMBER

12MP5A0B-M16-IN-WT