

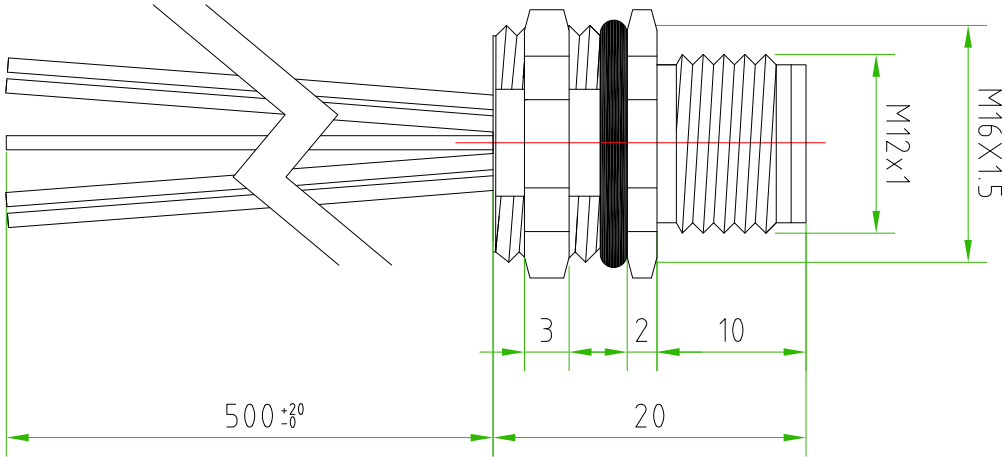



- BROWN ○ — 1
- WHITE ○ — 2
- BLUE ○ — 3
- BLACK ○ — 4
- GREY ○ — 5

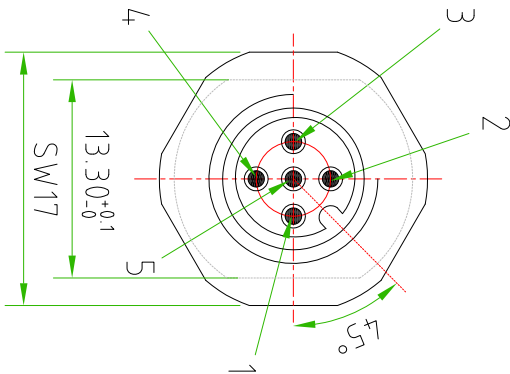

PAY ATTENTION to the CUT of the thread and the positioning of the internal core

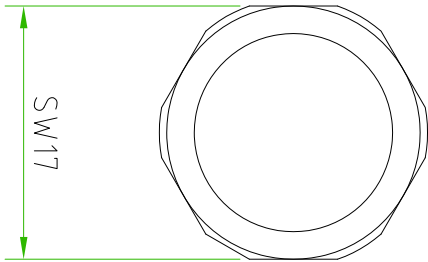

PANEL CUT

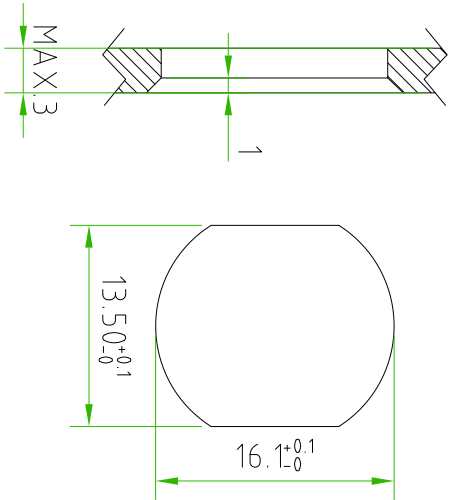

CONNECTOR FEATURES

CONNECTOR TYPE	M12 TO PANEL
MOUNTING TYPE	FRONTAL
CONTACT TYPE	MALE
NUMBER OF CONTACTS CONNECTED	n°5
HOUSING MATERIAL	Brass+nickel plated (CuZnNi)
FIXING THREAD	M16x15
SWITCH FIXED NUT	SW17
CONTACT TYPE	SOLDERED CONTACTS
SIZE CUT	13.3mm -0/+0.1
CONDUCTOR MATERIAL	PVC
CONDUCTOR LENGHT	500mm
CONDUCTOR SECTION	0.34mm ²
n°OF CONDUCTORS	n°5
RATED VOLTAGE	60V AC/DC
RATED CURRENT	4A
CONNECTOR WITHOUT H.T.P.LOGO	

TOLLERANZE		DISGNATORE LORENZO CHINNO		DATA	SCALE		DISEGNO N.
± 0.2				11.04.13	2:1		
UDM		ANGULO		CONTROLLATO			
DESCRIZIONE							
M12 MALE PANEL 5 POLES FRONTAL MOUNTING M16X15, WITH SOLDERED CONTACTS, WITH CUT ON THE THREAD M16X15, N°5 PVC WIRES 0.34mm ² 500mm							
Tipo						M12	
CODICE						12MP5B0E-M16-CUT	



High Tech Products

H.T.P.

HIGH TECH PRODUCTS