

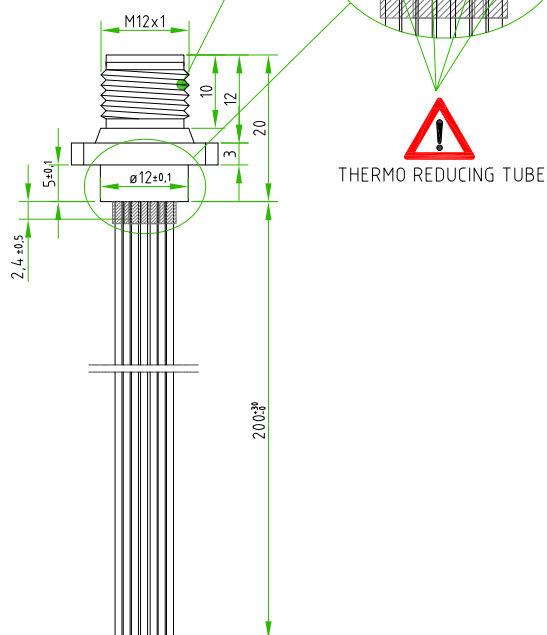


Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

WHITE	○	—	■	1
BROWN	○	—	■	2
GREEN	○	—	■	3
YELLOW	○	—	■	4
GREY	○	—	■	5
PINK	○	—	■	6
BLUE	○	—	■	7
RED	○	—	■	8

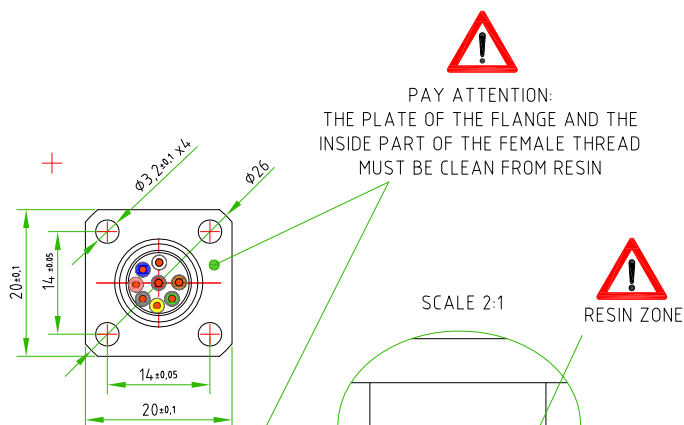

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR TO PANEL WITH FLANGE 20x20mm WITH WIRES
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 8POLES
	NUMBER OF CONTACTS CONNECTED	N°8
	HOUSING MATERIAL	BRASS+NICKEL PLATED
	FLANGE SIZE	20x20mm
	FIXING HOLES DIAMETER (X4)	ø3,2mm
	FIXING HOLES DISTANCE	14x14mm
	PROTECTION CLASS	IP67
	RATED VOLTAGE	30V AC/DC
WIRES FEATURES	RATED CURRENT	2A
	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	N°8
	CONDUCTORS SECTION	0,25mm <sup>2</sup>
	CONDUCTORS INSULATION MATERIAL	PVC
	CONDUCTORS LENGTH	200mm
PAY ATTENTION: ON EACH CONDUCTOR MUST BE APPLIED THE THERMO REDUCING TUBE		

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	CIMMINO L.	Date	2020-05-14	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	SUGLIANI R.	Date	2020-05-14	Scale	1:1	Size:	A4	Customer code:		



#### DESCRIPTION

CIRCULAR CONNECTOR M12, MALE, TO PANEL, 8POLES, FRONTAL MOUNTING, WITH FIXING FLANGE 20x20, FIXING HOLES DISTANCE 14x14, WITH N°8 WIRES PVC 0,25mm<sup>2</sup> L=200mm CONNECTOR WITHOUT ANY LOGO

#### H.T.P. PART NUMBER

12MP8A0B-FL

A4

