

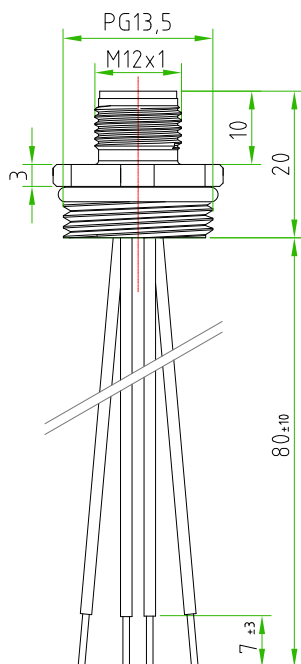


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved



PAY ATTENTION to the position of the polarization key towards the exagonal fixed nut.

BROWN	○	■	1
WHITE	○	■	2
BLUE	○	■	3
BLACK	○	■	4

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR PLATIC CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 4POLES
	NUMBER OF CONTACTS CONNECTED	N°4
	HOUSING MATERIAL	PA66 BASF C3U- BLACK
	INTERNAL CORE MATERIAL	PA66 BASF C3U- BLACK
	O-RING MATERIAL	NBR
	FIXING THREAD	PG13,5
	SIZE FIXED NUT(SW)	SW23
	SIZE MOBILE NUT(SW)	-
	PROTECTION CLASS	IP67
	RATED VOLTAGE	250V AC/DC
WIRES FEATURES	RATED CURRENT	4A
	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	N°4
	CONDUCTORS SECTION	AWG22 (0,34mm ²)
	CONDUCTORS INSULATION MATERIAL	PVC UL style 1007\1569 300V - 105°C 
	CONDUCTORS LENGHT	80mm
	PEELING AND TINNING	7mm SPECIAL


CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN
AND RETURN

A4



Designer	SUGLIANI R.	Date	2019-10-22	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2019-10-22	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION
CIRCULAR CONNECTOR M12, MALE, TO PANEL, 4POLES, FRONTAL MOUNTING, PG13,5 THREAD, WITH N°4 WIRES PVC UL style 1007\1569 AWG22 L=80mm
WIRES WITH SPECIAL PEELING AND TINNING L=7mm.
CONNECTOR WITHOUT ANY LOGO

H.T.P. PART NUMBER

12MPP439008-PG135-CP