




Rev.	01	Modify	-	Date	2017.07.14	Signed	SUGLIANI	Approved	CIMMINO
Rev.		Modify		Date		Signed		Approved	
Rev.		Modify		Date		Signed		Approved	



REV.01

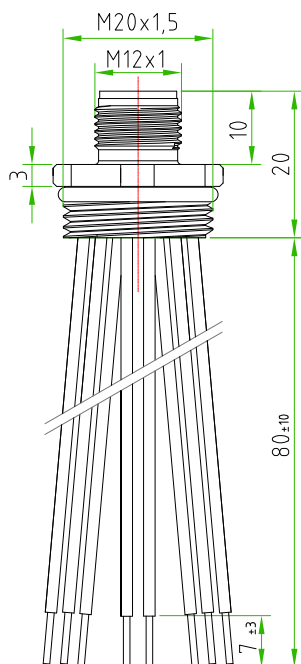

REV.01



PAY ATTENTION to the position of the polarization key towards the exagonal fixed nut.

REV.01

RED	○	■	1
VIOLET	○	■	2
BROWN	○	■	3
GREY	○	■	4
YELLOW	○	■	5
BLUE	○	■	6
GREEN	○	■	7
WHITE	○	■	8

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR PLATIC CONNECTOR TO PANEL WITH WIRES.
	TYPE MOUNTING	FRONTAL MOUNTING
	CONTACTS TYPE	MALE 8POLES
	NUMBER OF CONTACTS CONNECTED	REV.01 N°8
	HOUSING MATERIAL	PA66 BASF C3U- BLACK
	INTERNAL CORE MATERIAL	PA66 BASF C3U- BLACK
	O-RING MATERIAL	NBR
	FIXING THREAD	M20x1,5
	SIZE FIXED NUT(SW)	SW23
	SIZE MOBILE NUT(SW)	-
	PROTECTION CLASS	IP67
	RATED VOLTAGE	30V AC/DC
WIRES FEATURES	RATED CURRENT	2A
	CONNECTOR WITHOUT ANY LOGO	
	NUMBER OF CONDUCTORS	REV.01 N°8
	CONDUCTORS SECTION	AWG22 (0,34mm ²)
	CONDUCTORS INSULATION MATERIAL	PVC UL style 1007\1569 300V - 105°C 
	CONDUCTORS LENGHT	80mm
	PEELING AND TINNING	7mm SPECIAL

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2017-05-19	Tollerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2017-05-19	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12, MALE, TO PANEL, 8POLES (N°8 CONNECTED), FRONTAL MOUNTING, M20x1,5 THREAD, WITH N°8 WIRES PVC UL style 1007\1569 AWG22 L=80mm. WIRES WITH SPECIAL PEELING AND TINNING L=7mm. CONNECTOR WITHOUT ANY LOGO

H.T.P. PART NUMBER

12MPP81008-M20-CP

A4

