

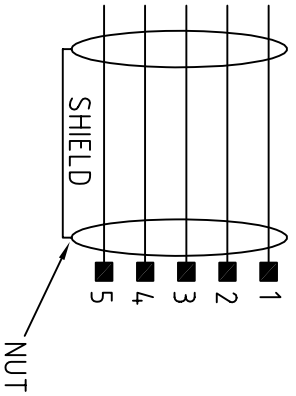


BROWN
WHITE
BLUE
BLACK
GREY

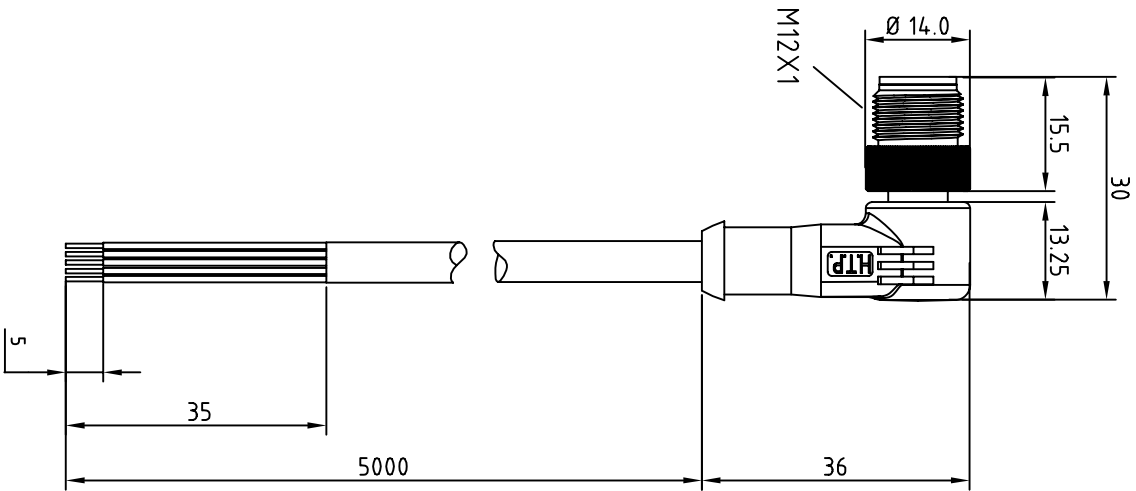

SHIELD CONNECTED TO THE NUT

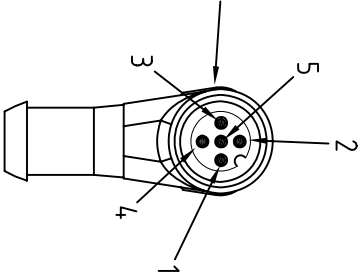

CABLE FEATURES		CONNECTOR FEATURES	
TYPE CONTACT	FEMALE SPOLES	TYPE CONTACT	FEMALE SPOLES
CABLE LENGTH	5000mm	CABLE LENGTH	5000mm
PROTECTION CLASS	IP69K	PROTECTION CLASS	IP69K
STRIPPING	35mm STANDARD	STRIPPING	35mm STANDARD
PEELING	5mm STANDARD	PEELING	5mm STANDARD
NUMBER OF CONTACTS CONNECTED	N°5	NUMBER OF CONTACTS CONNECTED	N°5
TOTALLY SHIELDED CONNECTOR(SHIELD CONNECTED TO THE NUT)		TOTALLY SHIELDED CONNECTOR(SHIELD CONNECTED TO THE NUT)	
H.T.P. CABLE CODE	Q	H.T.P. CABLE CODE	Q
NUMBER OF CONDUCTORS	n°5	NUMBER OF CONDUCTORS	n°5
CONDUCTOR SECTION	0.25mm ²	CONDUCTOR SECTION	0.25mm ²
CABLE MATERIAL	PVC CEI2022 II	CABLE MATERIAL	PVC CEI2022 II
COATING COLOUR	GREY	COATING COLOUR	GREY
CONDUCTOR INSULATION MATERIAL	PVC	CONDUCTOR INSULATION MATERIAL	PVC
CABLE SHIELDED		CABLE SHIELDED	

TOLLERANZE	DISIGNATORE	DATA	SCALA	OSSEGNO N.	
U4H	ANGELO	LORENZO CHINNO CONTROLLATO	03.04.09	1:1	
DESCRIZIONE		M12 CONNECTOR MALE 90° TOTALLY SHIELDED, SPOLES, WITH CABLE		PRO	M12
		PVC/PVC, SX0,25mm ² , CEI2022, GREY, SHIELDED, LENGTH 5m			
				COMB	12MV5Q5Z



H.T.P.
HIGH TECH PRODUCTS