
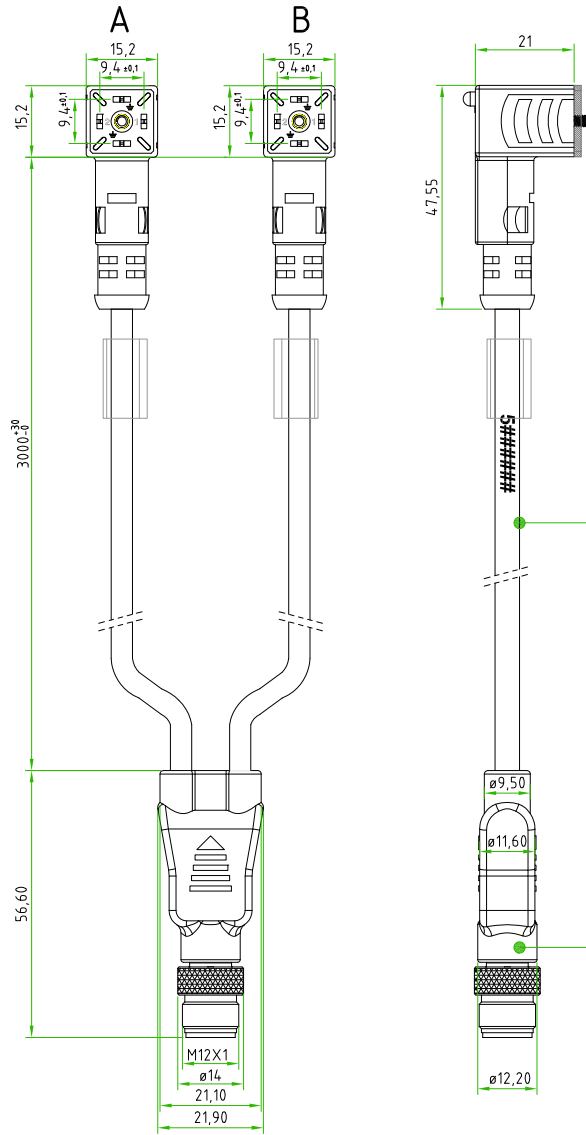
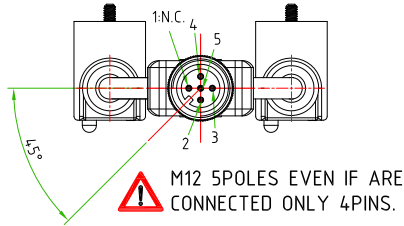




Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved

ELECTRICAL SCHEME:

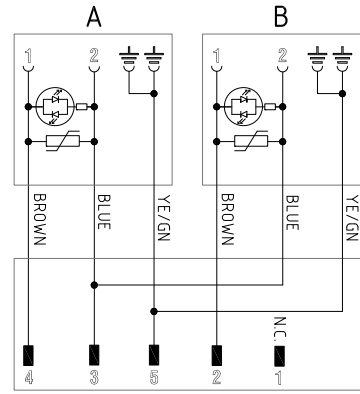

SIDE A-B	
PRODUCT TYPE	MULTISPLITTER WITH N°2 EXITS
CONNECTOR TYPE	MICRO CONNECTOR INDUSTRIAL STANDARD (type-C)
CONNECTOR COLOUR	BLACK
CONTACTS SPACING	9.4mm
NUMBER OF CONTACTS	2POLES+2EARTHS
EARTH POSITIONING	H.6-12
CENTRAL FIXING SCREW	M3X0,5 L=22,5mm
GASKET TYPE	INTEGRATED (NBR)
PROTECTION CLASS	IP67
CIRCUIT TYPE	BIPOLAR RED LED+VARISTOR
RATED VOLTAGE	24V AC/DC
CONNECTORS WITH H.T.P.LOGO	
ON EACH CONNECTOR'S HEAD MUST BE SILK PRINTED THE LETTERS REFERENCE: A-B.	
H.T.P.CABLE CODE	CAVO 09
NUMBER OF CONDUCTORS	N°3
CONDUCTORS SECTION	0,75mm ²
CABLE MATERIAL	PUR
COATING COLOUR	BLACK
CONDUCTORS INSULATION MATERIAL	PVC
CABLE LENGTHS	A:3000mm B:3000mm
ON THE CABLE,NEAR THE CONNECTOR HEAD SIDE A,MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	
ON EACH CABLE MUST BE APPLIED A HOLDER FOR CABLE MARKING.	

M12 Y 2WAY	
PRODUCT TYPE	Y M12 CIRCULAR CONNECTOR WITH N°2 EXITS
CONNECTOR TYPE	STRAIGHT 180°
CONTACTS TYPE	MALE 5POLES
NUMBER OF EXITS	2WAY



CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

A4

Designer	CIMMINO L.	Date	2019-05-15	Tolerance	±0.3	Units:	mm	Series	M12 Y 2WAY	Drawing n.
Approved	SUGLIANI R.	Date	2019-05-15	Scale	TO FIT	Size:	A4	Customer code:		
									DESCRIPTION Y CONNECTOR M12 WITH N°2 WAY; MICRO CONNECTORS INDUSTRIAL STANDARD(type-C), CONTACTS SPACING 9.4mm,2P.+P.E.,BLACK,WITH BIPOLAR RED LED+VARISTOR,24V AC/DC, WITH N° 2 CABLES PUR/PVC,3G0.75mm ² ,BLACK,L(A-B)=3m. CONNECTORS WITH H.T.P.LOGO	
									H.T.P.PART NUMBER A5093Z-0A-0A	