
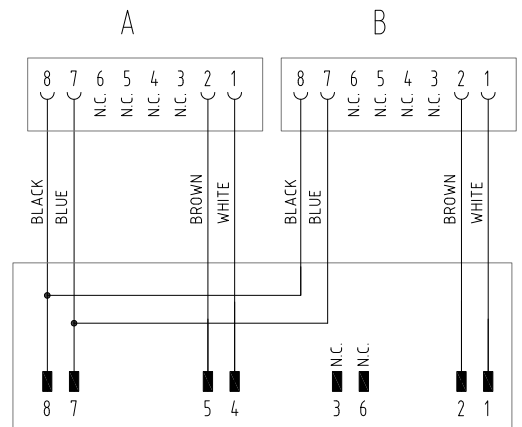


Rev.			
Modify			
Date			
Signed			
Approved			

Rev.			
Modify			
Date			
Signed			
Approved			

Rev.			
Modify			
Date			
Signed			
Approved			

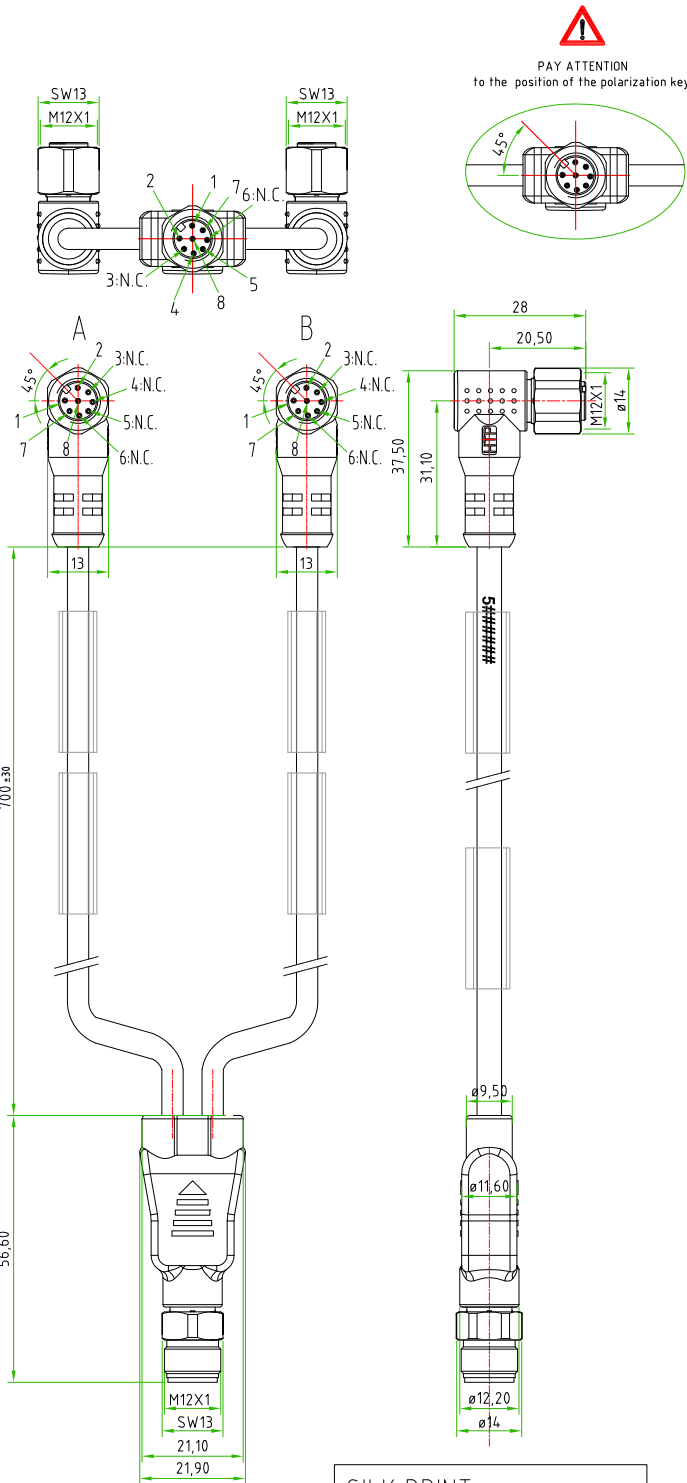


SIDE A/B	
PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
CONNECTOR TYPE	ANGLED 90°
CONTACTS TYPE	FEMALE 8POLES(4PINS)
NUMBER OF CONTACTS CONNECTED	N°4
PROTECTION CLASS	IP69K
RATED VOLTAGE	30V AC/DC
RATED CURRENT	2A
CONNECTORS WITH H.T.P.LOGO	
ON EACH CONNECTOR'S HEAD MUST BE SILK PRINTED THE LETTERS: A-B CONNECTORS WITH THE EXAGONAL(SW13) NUT IN STAINLESS STEEL MATERIAL AISI304.	
H.T.P.CABLE CODE	CAVO N-4
NUMBER OF CONDUCTORS	N°4
CONDUCTORS SECTION	0,25mm ²
CABLE MATERIAL	PVC CEI2022
COATING COLOUR	GREY RAL7032
CONDUCTORS INSULATION MATERIAL	PVC
CABLE LENGTHS	A:700mm B:700mm
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	
ON THE CABLE MUST BE APPLIED THE HOLDERS FOR CABLE MARKING.	

M12 Y 2WAY	
PRODUCT TYPE	Y M12 CIRCULAR CONNECTOR WITH N°2 EXITS
CONNECTOR TYPE	STRAIGHT 180°
CONTACTS TYPE	MALE 8POLES(6PINS)
NUMBER OF CONTACTS CONNECTED	N°6
NUMBER OF EXITS	2WAY
RATED VOLTAGE	30V AC/DC
RATED CURRENT	2A
CONNECTOR WITHOUT ANY LOGO	
CONNECTOR WITH THE EXAGONAL(SW13) NUT IN STAINLESS STEEL MATERIAL AISI304.	

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN



Designer	CIMMINO L.	Date	2017-07-04	Tolerance	±0.3	Units:	mm	Series	M12 Y 2WAY	Drawing n. 1-1
Approved	SUGLIANI R.	Date	2017-07-04	Scale	TO FIT	Size:	A4	Customer code:		

	DESCRIPTION	H.T.P.PART NUMBER
	Y CONNECTOR M12 WITH N°2 WAY; N°2 M12 CONNECTORS WITH HEXAGONAL NUTS, MALES, ANGLED 90°, 8POLES, WITH HEXAGONAL NUT, WITH CABLES PVC/PVC CEI2022, 4X0,25mm ² , GREY, L(A)=700mm; L(B)=700mm; CONNECTORS WITH H.T.P.LOGO AND WITH STAINLESS STEEL(AISI304) NUTS	A8N0G-D8-D8-INOX