
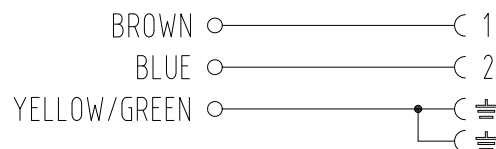





| Rev. | Modify | Date | Signed | Approved |
|------|--------|------|--------|----------|
|      |        |      |        |          |

| Rev. | Modify | Date | Signed | Approved |
|------|--------|------|--------|----------|
|      |        |      |        |          |

| Rev. | Modify | Date | Signed | Approved |
|------|--------|------|--------|----------|
|      |        |      |        |          |

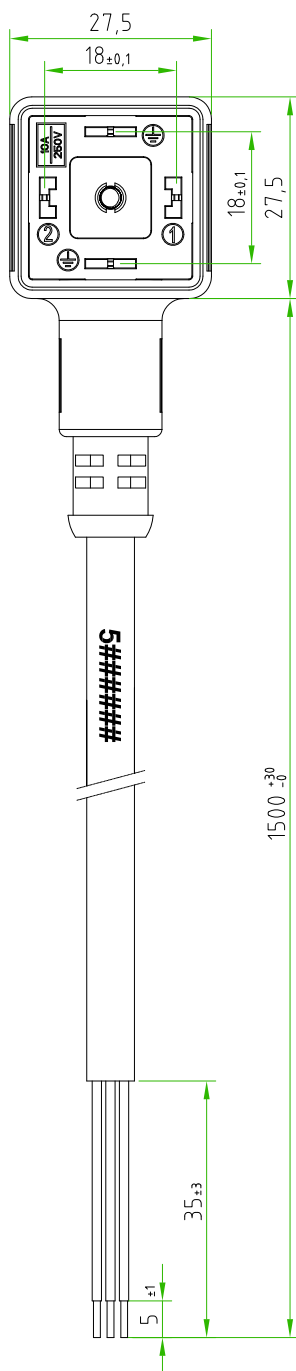

|                    |                                                                                                  |                                       |
|--------------------|--------------------------------------------------------------------------------------------------|---------------------------------------|
| CONNECTOR FEATURES | PRODUCT TYPE                                                                                     | SQUARE CONNECTOR EN175301-803(type-A) |
|                    | CONNECTOR COLOUR                                                                                 | BLACK                                 |
|                    | CONTACTS SPACING                                                                                 | 18mm                                  |
|                    | NUMBER OF CONTACTS                                                                               | 2POLES+2EARTHS                        |
|                    | EARTH POSITIONING                                                                                | H.6-12                                |
|                    | CENTRAL FIXING SCREW                                                                             | M3X0,5 L=25mm                         |
|                    | GASKET TYPE                                                                                      | INTEGRATED (NBR)                      |
|                    | PROTECTION CLASS                                                                                 | IP67                                  |
|                    | CIRCUIT TYPE                                                                                     | WITHOUT ELECTRONIC                    |
|                    | RATED VOLTAGE                                                                                    | 250V AC/ 300V DC                      |
| CABLE FEATURES     | CONNECTOR WITH H.T.P. LOGO                                                                       |                                       |
|                    | H.T.P.CABLE CODE                                                                                 | CAVO 67                               |
|                    | NUMBER OF CONDUCTORS                                                                             | N°3                                   |
|                    | CONDUCTORS SECTION                                                                               | AWG18(0.83mm <sup>2</sup> )           |
|                    | CABLE MATERIAL                                                                                   | PUR ULstyle21576 (HALOGEN FREE)       |
|                    | COATING COLOUR                                                                                   | BLACK                                 |
|                    | CONDUCTORS INSULATION MATERIAL                                                                   | PUR                                   |
|                    | CABLE LENGHT                                                                                     | 1500mm                                |
|                    | STRIPPING                                                                                        | 35mm STANDARD                         |
|                    | PEELING AND TINNING                                                                              | 5mm STANDARD                          |
|                    | ON THE CABLE,NEAR THE CONNECTOR HEAD,MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5##### |                                       |

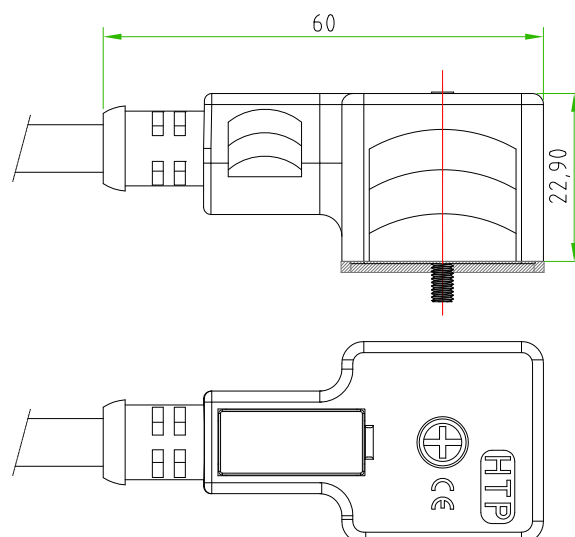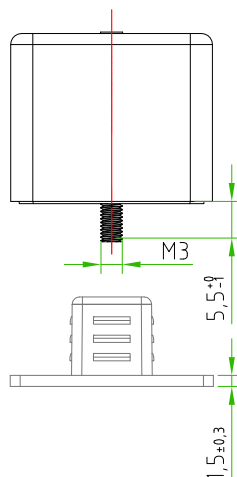

|                        |      |
|------------------------|------|
| CUSTOMER APPROVAL      |      |
| SIGNATURE              | DATE |
|                        |      |
| PLEASE SIGN AND RETURN |      |

|          |            |      |            |           |      |        |    |                |              |                   |
|----------|------------|------|------------|-----------|------|--------|----|----------------|--------------|-------------------|
| Designer | CIMMINO L. | Date | 2019-01-11 | Tolerance | ±0.3 | Units: | mm | Series         | EN175301-803 | Drawing n.<br>1-1 |
| Approved | MAZZOLA M. | Date | 2019-01-11 | Scale     | 1:1  | Size:  | A4 | Customer code: |              |                   |



#### DESCRIPTION

SQUARE CONNECTOR EN175301-803(type-A),2P.+P.E.,BLACK,WITHOUT ELECTRONIC, 250V AC/300V DC,WITH CABLE PUR/PUR,ULstyle21576,3G0.75mm<sup>2</sup>,HALOGEN FREE, BLACK COLOUR,L=1.5m.CONNECTOR WITH H.T.P.LOGO

#### H.T.P.PART NUMBER

CG1N02000C671E