



Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

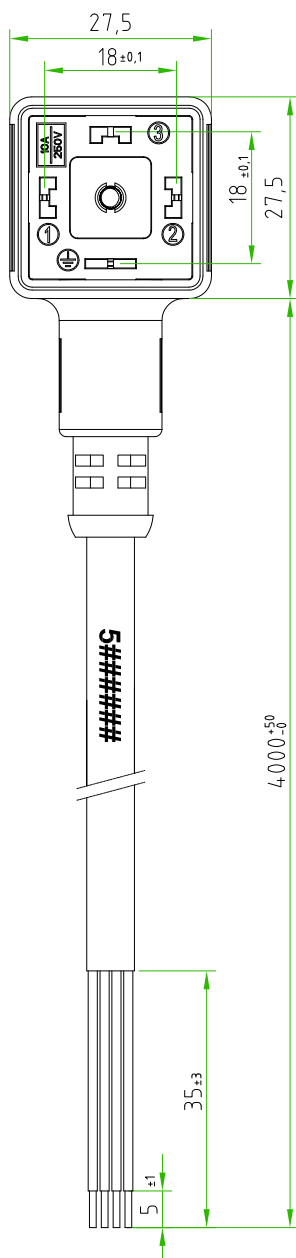

BROWN ○ ————— C 1
 WHITE ○ ————— C 2
 BLUE ○ ————— C 3
 YELLOW/GREEN ○ ————— C $\perp$

CONNECTOR FEATURES	PRODUCT TYPE	SQUARE CONNECTOR EN175301-803(type-A)
	CONNECTOR COLOUR	BLACK
	CONTACTS SPACING	18mm
	NUMBER OF CONTACTS	3POLES+EARTH
	EARTH POSITIONING	H.6
	CENTRAL FIXING SCREW	M3X0,5 L=25mm
	GASKET TYPE	INTEGRATED (NBR)
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
	RATED VOLTAGE	250V AC/300V DC
CABLE FEATURES	CONNECTOR WITH H.T.P.LOGO	
	H.T.P.CABLE CODE	CAVO 44
	NUMBER OF CONDUCTORS	N°4
	CONDUCTORS SECTION	0,5mm ² (AWG20)
	CABLE MATERIAL	PVC ULstyle 21179
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	PVC
	CABLE LENGHT	4000mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
	ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	

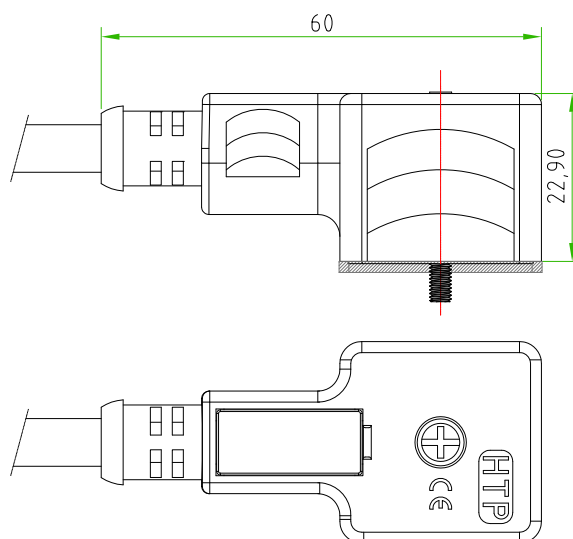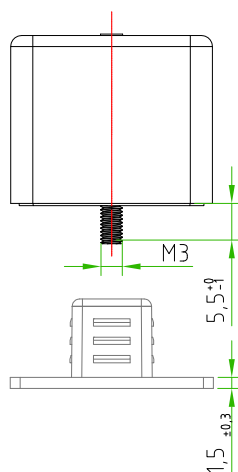

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	CIMMINO L.	Date	2016-07-07	Tolerance	±0.1	Units:	mm	Series	EN175301-803	Drawing n. 1-1
Approved	MAZZOLA M.	Date	2016-07-07	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

SQUARE CONNECTOR EN175301-803(type-A), 3P.+P.E., BLACK, WITHOUT ELECTRONIC, 250V AC/300V DC, WITH CABLE PVC/PVC, ULstyle 21179, 4G0.5mm², BLACK, L=4m. CONNECTOR WITH H.T.P.LOGO

H.T.P.PART NUMBER

CG1N03000A444

