



Rev.	Modify	Date	Signed	Approved



Rev.	Modify	Date	Signed	Approved

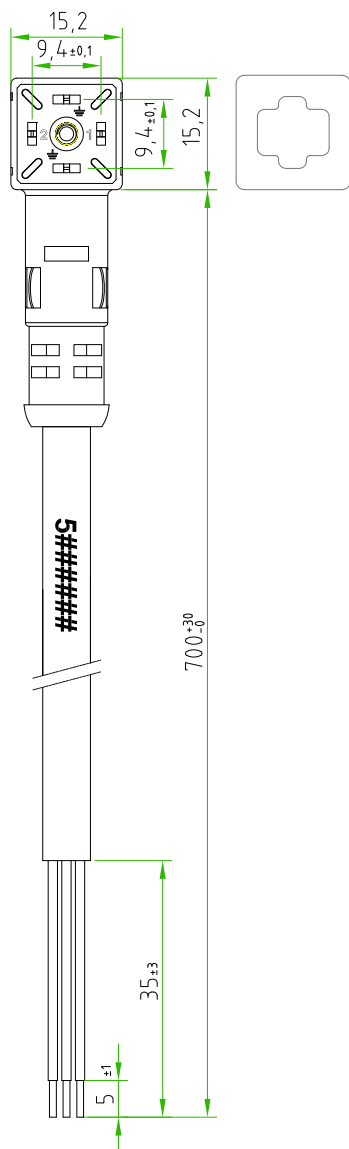

Rev.	Modify	Date	Signed	Approved

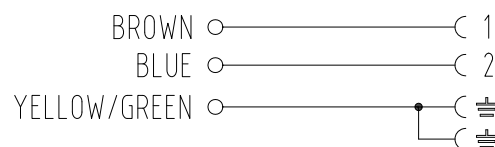

CONNECTOR FEATURES	PRODUCT TYPE	MICRO CONNECTOR INDUSTRIAL STANDARD (type C)
	CONNECTOR COLOUR	BLACK
	CONTACTS SPACING	9,4mm
	NUMBER OF CONTACTS	2POLES+2EARTHS
	EARTH POSITIONING	H.6-12
	CENTRAL FIXING SCREW	M3X0,5 L=22,5mm
	GASKET TYPE	INTEGRATED (NBR)
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
	RATED VOLTAGE	250V AC / 300V DC
CABLE FEATURES	CONNECTOR WITH H.T.P.LOGO	
	H.T.P.CABLE CODE	CAVO 01
	NUMBER OF CONDUCTORS	N°3
	CONDUCTORS SECTION	0,5mm ²
	CABLE MATERIAL	PVC IEC332-1 H03VVF
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	PVC
	CABLE LENGHT	700mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
	ON THE CABLE,NEAR THE CONNECTOR HEAD,MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	

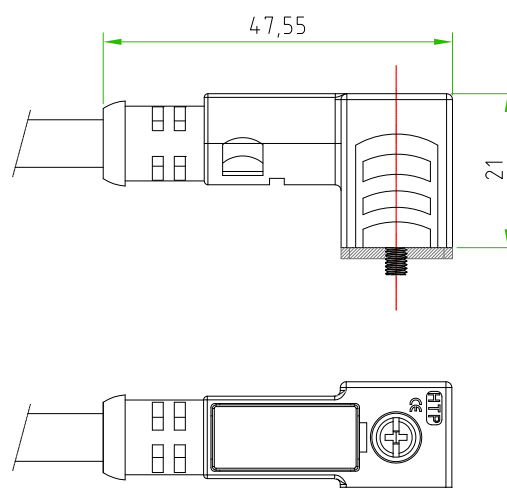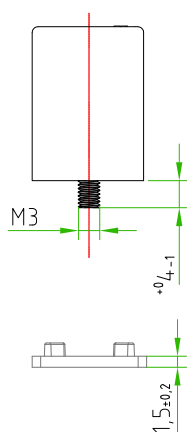CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	



Designer	SUGLIANI R.	Date	2016-03-30	Tolerance	±0.3	Units:	mm	Series	INDUSTRIAL STANDARD	Drawing n. 1-1
Approved	CIMMINO L.	Date	2016-03-30	Scale	1:1	Size:	A4	Customer code:		
 		DESCRIPTION SQUARE MICRO CONNECTOR,INDUSTRIAL STANDARD(type-C),2P.+P.E.,9,4mm, BLACK,WITHOUT ELECTRONIC,250V AC / 300V DC ,WITH CABLE PVC/PVC, IEC332-1 H03VVF, 3G0.5mm ² ,BLACK COLOUR,L=0,7m.CONNECTOR WITH H.T.P.LOGO							H.T.P.PART NUMBER CP2N02000C010G	