

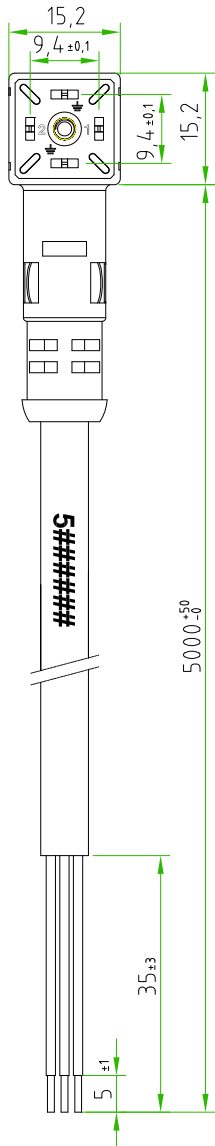


Rev.	Modify	Date	Signed	Approved


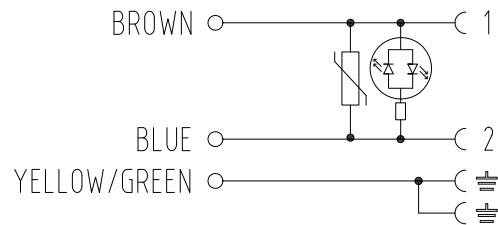


CONNECTOR FEATURES	PRODUCT TYPE	MICRO CONNECTOR INDUSTRIAL STANDARD (Type C)
	CONNECTOR COLOUR	BLACK
	CONTACTS SPACING	9,4mm
	NUMBER OF CONTACTS	2POLES+2EARTH
	EARTH POSITIONING	H.6-12
	CENTRAL FIXING SCREW	M3X0,5 L=22,5mm
	GASKET TYPE	INTEGRATED (NBR)
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	BIPOLAR YELLOW LED+VARISTOR
	RATED VOLTAGE	24V AC/DC
CONNECTOR WITH H.T.P.LOGO		
CABLE FEATURES	H.T.P.CABLE CODE	CAVO 04
	NUMBER OF CONDUCTORS	N°3
	CONDUCTORS SECTION	0,5mm ²
	CABLE MATERIAL	PVC CEI2022IIOR
	COATING COLOUR	GREY RAL7032
	CONDUCTORS INSULATION MATERIAL	PVC
	CABLE LENGHT	5000mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

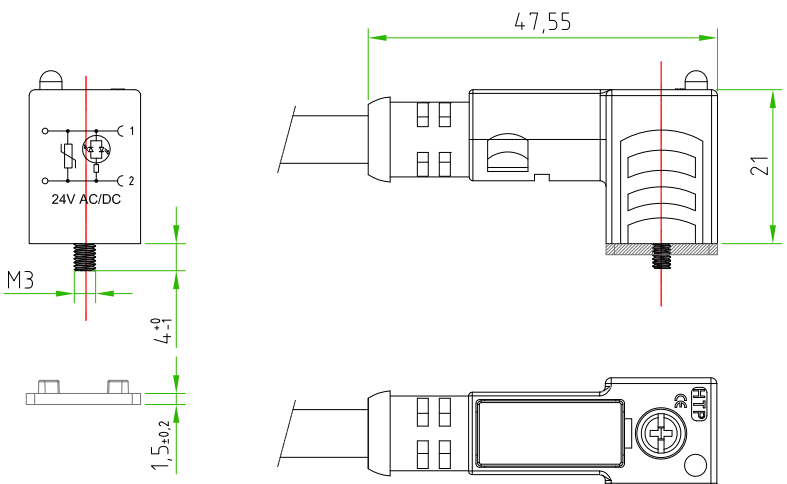

Designer	CIMMINO L.	Date	2016-03-08	Tolerance	±0.3	Units	mm	Series	INDUSTRIAL STANDARD	Drawing n.	1-1
Approved	MAZZOLA M.	Date	2016-03-08	Scale	1:1	Size	A4	Customer code:			
DESCRIPTION SQUARE MICRO CONNECTOR, INDUSTRIAL STANDARD (type-C), 2P.+P.E., 9,4mm, BLACK, WITH BIPOLAR YELLOW LED+VARISTOR, 24V, WITH CABLE PVC/PVC, CEI2022, 3G0, 5mm ² , GREY COLOUR, L=5m, CONNECTOR WITH H.T.P.LOGO								H.T.P.PART NUMBER CP2N02VG1C045			