


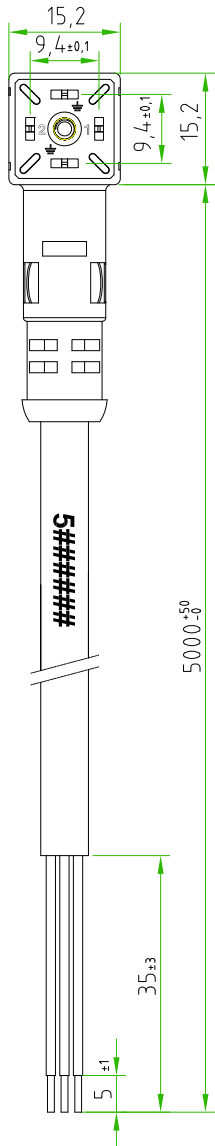


Rev.	Modify	Date	Signed	Approved

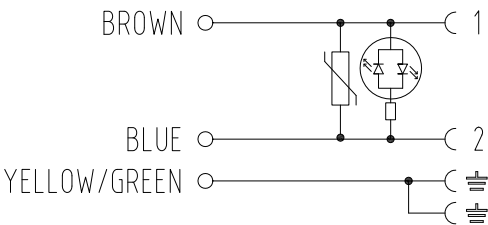

CONNECTOR FEATURES	PRODUCT TYPE	MICRO CONNECTOR INDUSTRIAL STANDARD (type C)
	CONNECTOR COLOUR	BLACK
	CONTACTS SPACING	9,4mm
	NUMBER OF CONTACTS	2POLES+2EARTHS
	EARTH POSITIONING	H.6-12
	CENTRAL FIXING SCREW	M3X0,5 L=22,5mm
	GASKET TYPE	INTEGRATED (NBR)
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	BIPOLAR RED LED+VARISTOR
	RATED VOLTAGE	115V AC/DC
CONNECTOR WITH H.T.P.LOGO		
CABLE FEATURES	H.T.P.CABLE CODE	CAVO 01
	NUMBER OF CONDUCTORS	N°3
	CONDUCTORS SECTION	0,5mm ²
	CABLE MATERIAL	PVC IEC332-1 H03VVF
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	PVC
	CABLE LENGHT	5000mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
	ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	

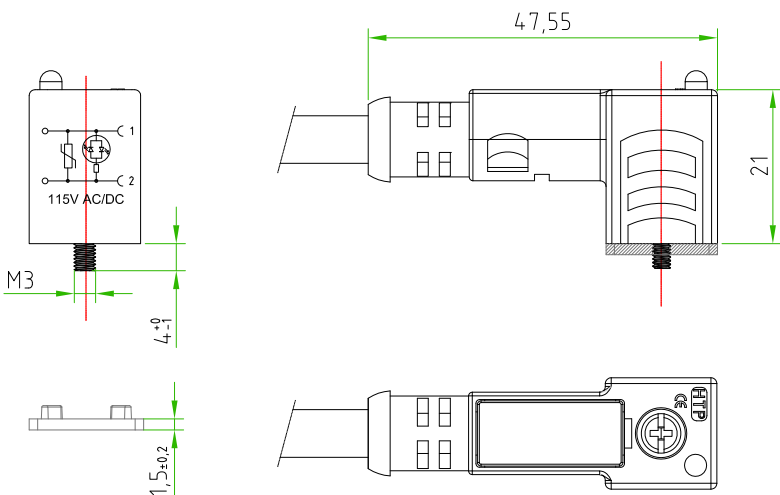


CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2017-05-29	Tolerance	±0.3	Units:	mm	Series	INDUSTRIAL STANDARD	Drawing n.	1-1
Approved	CIMMINO L.	Date	2017-05-29	Scale	1:1	Size:	A4	Customer code:			

A4



DESCRIPTION
 SQUARE MICRO CONNECTOR, INDUSTRIAL STANDARD (type-C), 2P.+P.E., 9,4mm, BLACK, WITH BIPOLAR RED LED+VARISTOR, 115V, WITH CABLE PVC/PVC, IEC332-1 H03VVF, 3G0,5mm², BLACK COLOUR, L=5m, CONNECTOR WITH H.T.P.LOGO

H.T.P.PART NUMBER
 CP2N02VL2C015