

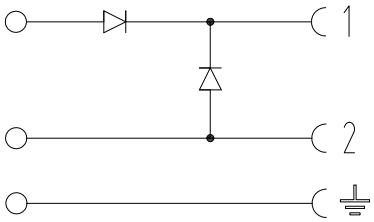

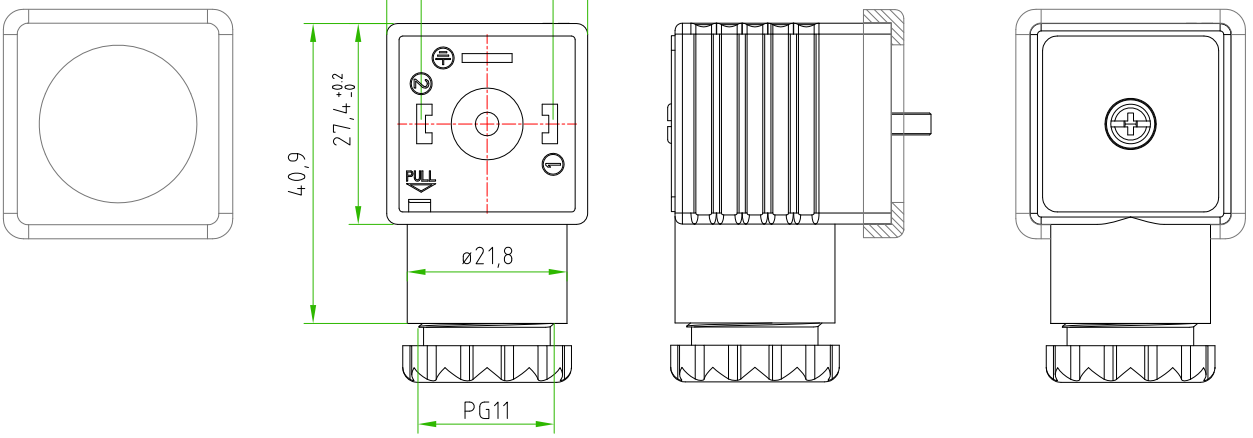

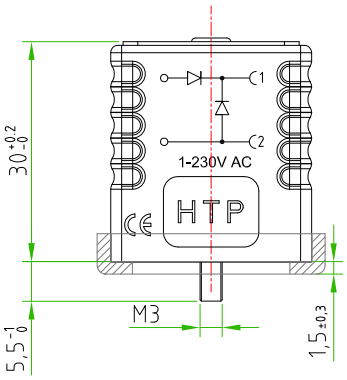

PAY ATTENTION:
MUST BE USED THE SPECIAL INTERNAL CORE FOR ELECTRONIC WITH BRIDGE RECTIFIER



CONNECTOR FEATURES

PRODUCT TYPE	EN175301-803 FORM A FIELD ATTACHABLE.
HOUSING MATERIAL/COLOUR	PA66 /BLACK
PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
INTERNAL CORE MATERIAL/COLOUR	PA66 /BLACK
HEIGHT HOUSING	30mm
CONTACTS SPACING	18mm
CONTACTS TYPE	SCREW CONTACTS (with protection plate)
NUMBER OF POLES	2POLES+EARTH
EARTH POSITIONING	H.12 (TURNABLE)
CABLE EXIT	PG9/11 UNIFIED
SUITABLE CABLE	FROM ø6mm TO ø10mm
MAX.CONDUCTOR SIZE	1,5mm²
PROTECTION CLASS	IP67
CIRCUIT TYPE	HALF-WAVE RECTIFIER + DIODE (N°2 DIODES:1N4007) TO GIVE OVERVOLTAGE PROTECTION WHEN SWITCHING OFF SUPPLY.
RATED VOLTAGE	1-230V AC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED (NBR)
FIXING SCREW	M3X0,5 L=32,5mm
CONNECTOR WITH H.T.P. LOGO	

Designer	CIMMINO L.	Date 2019-06-28	Tollerance ±0,2	Units: mm	Series EN175301-803 (form A)	Drawing n. 1-1
Approved	SUGLIANI R.	Date 2019-06-28	Scale 1:1	Size: A4	Customer code:	

DESCRIPTION
SQUARE CONNECTOR EN175301-803 FORM A,FIELD ATTACHABLE,2P.+PE, BLACK HOUSING,WITH HALF-WAVE RECTIFIER+DIODE (1N4007),1-230V AC, PG9/11 unified. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER
G1NU2E13

H.T.P. High Tech Products S.R.L. Via Lesina,45 -24030- Brembate di Sopra (Bg) - ITALY Phone:+39.035692509 Fax:+39.035203291 E-mail: info@webhtp.eu Web: http://www.webhtp.eu/

ALL RIGHTS ARE RESERVED.