
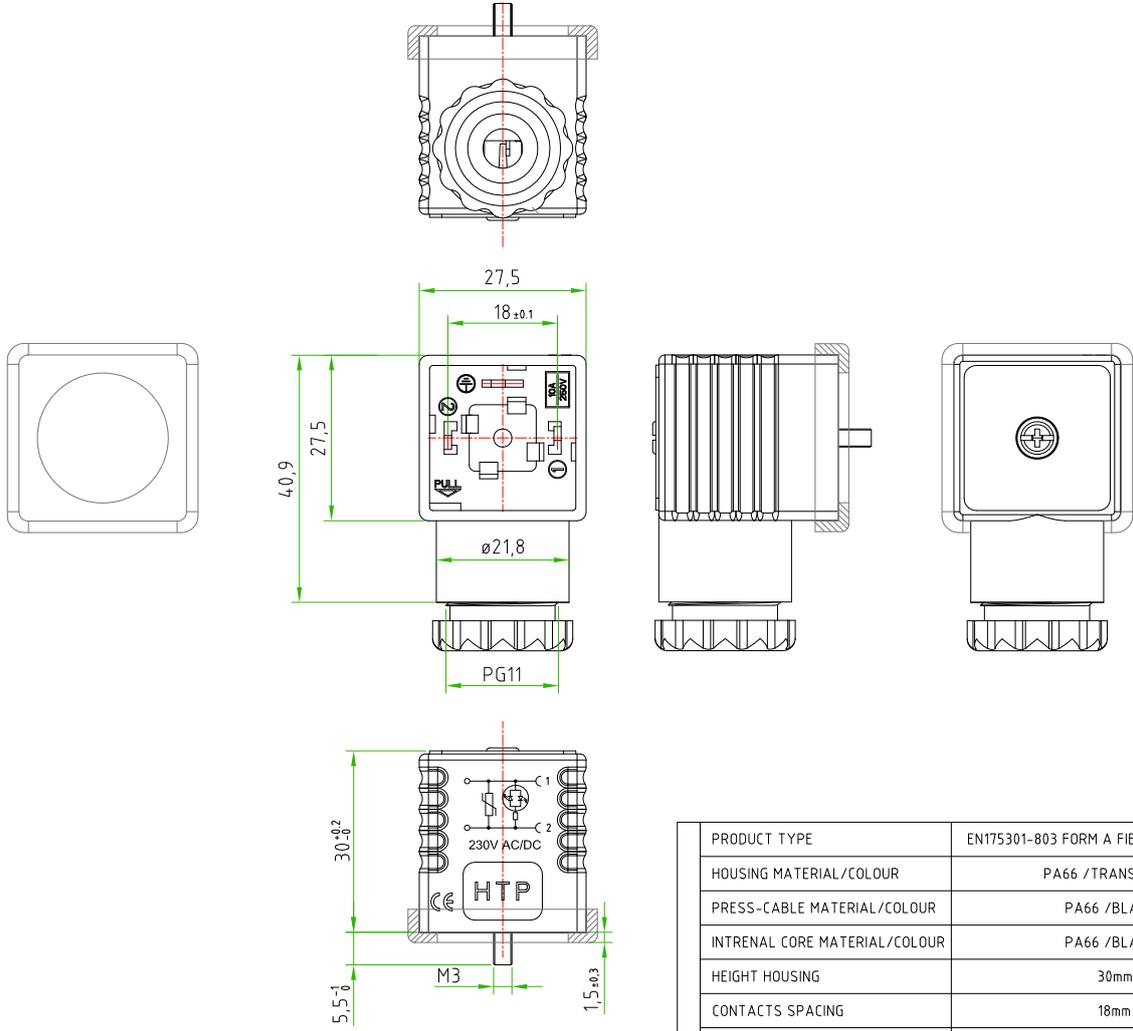


| | | | | |
|------|--------|------|-------|----------|
| Rev. | Modify | Date | Firma | Approved |
| | | | | |

| | | | | |
|------|--------|------|-------|----------|
| Rev. | Modify | Date | Firma | Approved |
| | | | | |


| | | | | |
|------|--------|------|--------|----------|
| Rev. | Modify | Date | Signed | Approved |
| | | | | |

| | |
|------------------------|------|
| CUSTOMER APPROVAL | |
| SIGNATURE | DATE |
| | |
| PLEASE SIGN AND RETURN | |



| | | |
|----------------------------|-------------------------------|---------------------------------------|
| CONNECTOR FEATURES | PRODUCT TYPE | EN175301-803 FORM A FIELD ATTACHABLE. |
| | HOUSING MATERIAL/COLOUR | PA66 /TRANSPARENT |
| | PRESS-CABLE MATERIAL/COLOUR | PA66 /BLACK |
| | INTRENAL CORE MATERIAL/COLOUR | PA66 /BLACK |
| | HEIGHT HOUSING | 30mm |
| | CONTACTS SPACING | 18mm |
| | CONTACTS TYPE | SCREW CONTACTS(with protection plate) |
| | NUMBER OF POLES | 2POLES+EARTH |
| | EARTH POSITIONING | H.12 (TURNABLE) |
| | CABLE EXIT | PG9/11 UNIFIED |
| | SUITABLE CABLE | FROM ø6mm TO ø10mm |
| | MAX.CONDUCTOR SIZE | 1,5mm ² |
| | PROTECTION CLASS | IP67 |
| | CIRCUIT TYPE | BIPOLAR YELLOW LED+VARISTOR |
| | RATED VOLTAGE | 230V AC/DC |
| | CONNECTOR TEMPERATURE RANGE | from -40°C to +90°C |
| GASKET TYPE | PROFILED NBR | |
| FIXING SCREW | M3X0,5 L=32,5mm | |
| CONNECTOR WITH H.T.P. LOGO | | |

| | | | | | | | | | | |
|----------|-------------|------|------------|-----------|------|--------|----|----------------|-----------------------|-------------------|
| Designer | CIMMINO L. | Date | 2016-10-27 | Tolerance | ±0,2 | Units: | mm | Series | EN175301-803 (form A) | Drawing n. 1/1 |
| Approved | SUGLIANI R. | Date | 2016-10-27 | Scale | 1:1 | Size: | A4 | Customer code: | | |



DESCRIPTION
 SQUARE CONNECTOR EN175301-803 FORM A, FIELD ATTACHABLE, 2P. +PE, WITH BIPOLAR YELLOW LED+VARISTOR, 230V AC/DC, TRANSPARENT HOUSING, PG9/11 unified. CONNECTOR WITH H.T.P. LOGO.

H.T.P. PART NUMBER
 G1TU2VG3