





PAY ATTENTION:
THE M12 TO PANEL CONNECTORS
MUST BE FIXED WITH THE RESIN



PAY ATTENTION: THE
POLARIZATION KEYS MUST BE IN
THE SAME DIRECTION TOWARDS
THE LEDS POSITION

MALE/FEMALE	PIN #	
	1	+24V
	3	0V DC
	2 / 4	NOT CONN.

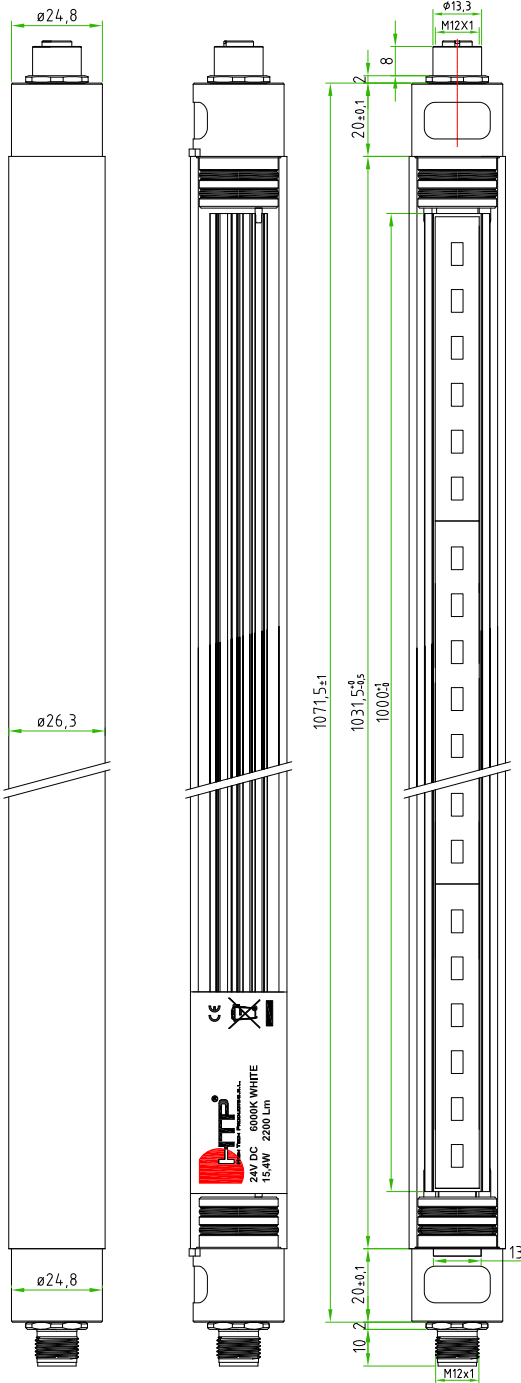


PRODUCT TYPE	INDUSTRIAL LIGHTING
CONNECTORS TYPE	M12 TO PANEL
CONTACT TYPE	FEMALE-MALE
NUMBER OF CONTACTS	n°4
NUMBER OF CONTACTS CONNECTED	n°2
TUBE DIAMETER	ø26,3mm
TUBE MATERIAL	G3.3 BOROSILICATE GLASS
ADAPTORS MATERIAL/COLOUR	POLYCARBONATE/LIGHT GREY (RAL 7035)
LIGHTING LENGTH	1000mm
OPERATING TEMPERATURE	FROM -25°C TO +60°C
LIGHTCOLOUR	6000K WHITE
COLOUR RENDERING(RA)	>80
RATED VOLTAGE	24V DC
RATED POWER	15,4W
LUMINOUS FLUX	2200 lm
PROTECTION CLASS	IP67/IP69K
LED LAMP WITH H.T.P. LOGO	



PACKAGING

THIS PRODUCT MUST BE ROLLED WITH PLURIBALL FOIL AND
MUST BE PACKED IN A SINGLE CARTON BOX COMPLETE OF CAPS
AND N°2 FIXING TIE CLIPS ø25mm




CODE:
CAPS 12-F-P

CODE:
CAPS 12-M-P


FIXING HOLE 8,6X5mm



ON THE LAMP (M12 MALE BOTTOM SIDE)
MUST BE APPLIED THIS SILVER LABEL



PAY ATTENTION: THE
POLARIZATION KEYS MUST BE IN
THE SAME DIRECTION TOWARDS
THE LEDS POSITION



CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	SUGLIANI R.	Date	2020-06-17	Tolerance	±0.3	Units:	mm	Series	INDUSTRIAL LIGHTING	Drawing n. 1-1
Approved	CIMMINO L.	Date	2020-06-17	Scale	1:2	Size:	A4	Customer code:		



DESCRIPTION

INDUSTRIAL LIGHTING, LED LIGHT TUBE 24V DC, LAMP LENGTH=1000mm
WITH BOROSILICATE TRANSPARENT TUBE AND M12 CONNECTORS MALE
AND FEMALE 4POLES TO PANEL, LAMP WITH H.T.P. LOGO

H.T.P. PART NUMBER

LED-12FD-G1000-12MD

A4

