
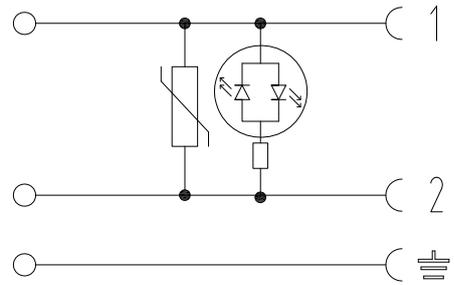
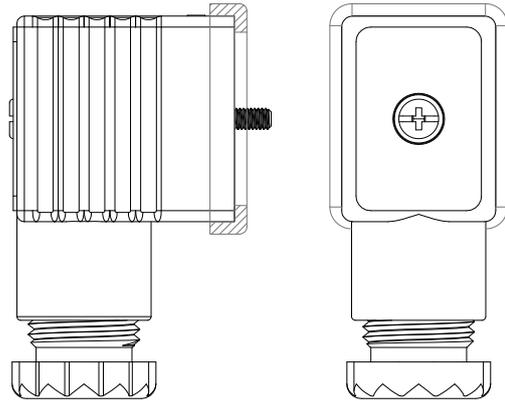

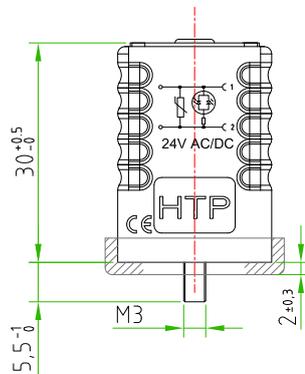
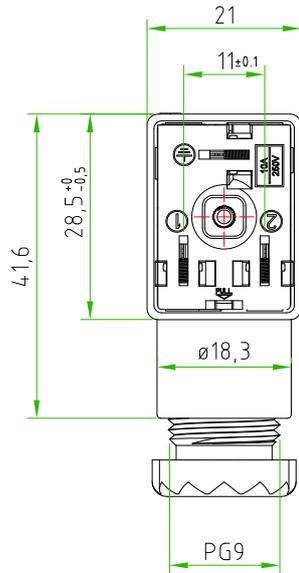


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Firma	Approved
Rev.	Modify	Date	Firma	Approved
Rev.	Modify	Date	Firma	Approved



PRODUCT TYPE	INDUSTRIAL STANDARD FORM B FIELD ATTACHABLE.
HOUSING MATERIAL/COLOUR	PA66 / TRANSPARENT
PRESS-CABLE MATERIAL/COLOUR	PA66 / BLACK
INTRENAL CORE MATERIAL/COLOUR	PA66 / BLACK
HEIGHT HOUSING	30mm
CONTACTS SPACING	11mm
CONTACTS TYPE	SCREW CONTACTS(with protection plate)
NUMBER OF POLES	2POLES+EARTH
EARTH POSITIONING	H.12 (TURNABLE)
CABLE EXIT	PG9
SUITABLE CABLE	FROM ø6mm TO ø8mm
MAX.CONDUCTOR SIZE	1,5mm ²
PROTECTION CLASS	IP67
CIRCUIT TYPE	BIPOLAR GREEN LED+ VARISTOR
RATED VOLTAGE	24V AC/DC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED NBR
FIXING SCREW	M3X0,5 L=32,5mm
CONNECTOR WITH H.T.P. LOGO	

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2017-12-19	Tolerance	±0,2	Units:	mm	Series	INDUSTRIAL STANDARD (form B)	Drawing n.	1/1
Approved	CIMMINO L.	Date	2017-12-19	Scale	1:1	Size:	A4	Customer code:			

DESCRIPTION

RECTANGULAR CONNECTOR INDUSTRIAL STANDARD FORM B, FIELD ATTACHABLE, 2P.+PE, WITH BIPOLAR GREEN LED + VARISTOR, 24V, TRANSPARENT HOUSING, PG9. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

M1TS2VV1



A4

