
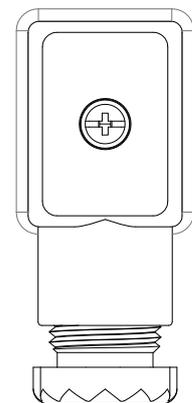
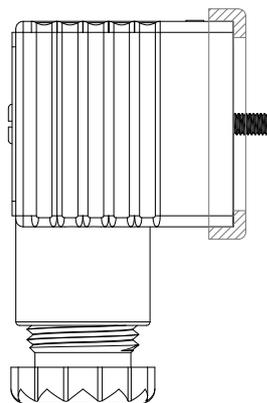
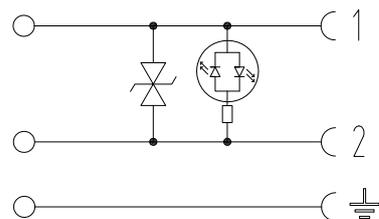

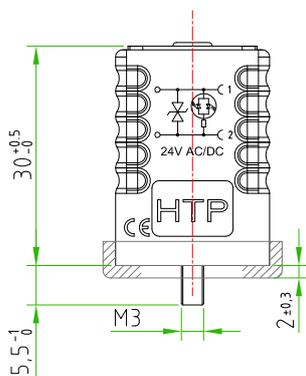
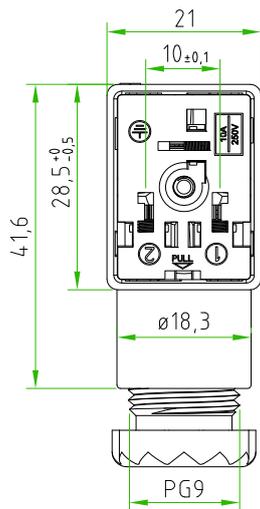


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Firma	Approved
Rev.	Modify	Date	Firma	Approved



CUSTOMER APPROVAL

SIGNATURE      DATE

PLEASE SIGN AND RETURN

CONNECTOR FEATURES	PRODUCT TYPE	EN175301-803 STANDARD FORM B FIELD ATTACHABLE
	HOUSING MATERIAL/COLOUR	PA66 / TRANSPARENT
	PRESS-CABLE MATERIAL/COLOUR	PA66 / BLACK
	INTERNAL CORE MATERIAL/COLOUR	PA66 / BLACK
	HEIGHT HOUSING	30mm
	CONTACTS SPACING	10mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	2POLES+EARTH
	EARTH POSITIONING	H.12 (TURNABLE)
	CABLE EXIT	PG9
	SUITABLE CABLE	FROM ø6mm TO ø8mm
	MAX.CONDUCTOR SIZE	1,5mm <sup>2</sup>
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	BIPOLAR RED LED + TRANSIENT VOLTAGE SUPPRESSION DIODE
	RATED VOLTAGE	24V AC/DC
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED NBR	
FIXING SCREW	M3X0,5 L=32,5mm	
CONNECTOR WITH H.T.P. LOGO		

Designer	CIMMINO L.	Date	2021-04-28	Tolerance	±0,2	Units:	mm	Series	EN175301-803 (form B)	Drawing n.	1/1
Approved	SUGLIANI R.	Date	2021-04-28	Scale	1:1	Size:	A4	Customer code:			

DESCRIPTION

RECTANGULAR CONNECTOR EN175301-803 FORM B, FIELD ATTACHABLE, 10mm, 2P+PE, WITH RED LED+TRANSIENT VOLTAGE SUPPRESSION DIODE, 24VAC/DC, TRANSPARENT HOUSING, PG9. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

M2TS2TL1



A4

