
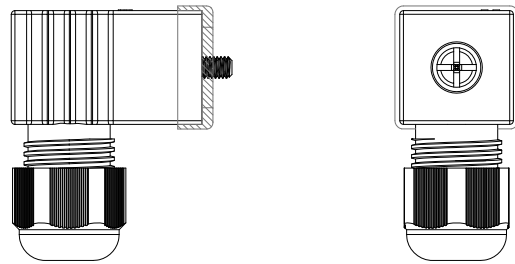

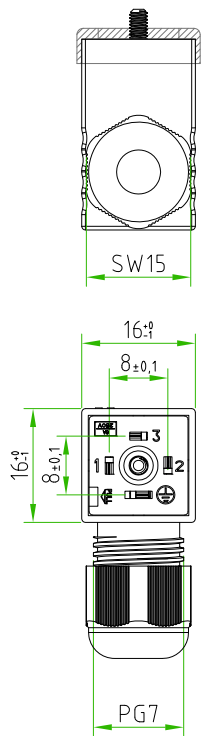


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Approved	Firma
Rev.	Modify	Date	Approved	Firma
Rev.	Modify	Date	Approved	Firma




CONNECTOR FEATURES	PRODUCT TYPE	SQUARE MICRO CONNECTOR EN175301-803 FORM C FIELD ATTACHABLE.
	HOUSING MATERIAL/COLOUR	PA66 /BLACK
	PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
	INTERNAL CORE MATERIAL/COLOUR	PA66 /BLACK
	HEIGHT HOUSING	26mm
	CONTACTS SPACING	8mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	3POLES+EARTH
	EARTH POSITIONING	H.6 (TURNABLE)
	CABLE EXIT	SK SYSTEM (SW15)
	SUITABLE CABLE	FROM ø3,5mm TO ø5,mm
	MAX.CONDUCTOR SIZE	0,75mm ²
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
RATED VOLTAGE	250V AC / 300V DC	
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C	
GASKET TYPE	PROFILED NBR	
FIXING SCREW	M2.5X0.5 L=28mm	
CONNECTOR WITH H.T.P. LOGO		

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

Designer	SUGLIANI R.	Date	2020-11-05	Tolerance	±0,3	Units:	mm	Series	EN175301-803 (form C)	Drawing n. 1/1
Approved	CIMMINO L.	Date	2020-11-05	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

SQUARE MICRO CONNECTOR EN175301-803 (form C), FIELD ATTACHABLE, 3P.+PE, WITHOUT ELECTRONIC, 250V AC/300V DC, BLACK HOUSING, SK SYSTEM. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

P1NZ3000-SK