








Rev.				
Modify				
Date				
Firma				
Approved				

Rev.				
Modify				
Date				
Firma				
Approved				


Rev.				
Modify				
Date				
Signed				
Approved				

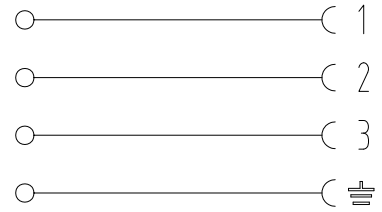

CONTACTS WITHOUT SOLDER ZONE



SPRING CONTACTS



CONNECTOR FEATURES	
PRODUCT TYPE	SQUARE MICRO INDUSTRIAL STANDARD FORM C FIELD ATTACHABLE.
HOUSING MATERIAL/COLOUR	PA66 /BLACK
PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
INTERNAL CORE MATERIAL/COLOUR	PA66 /BLACK
HEIGHT HOUSING	26mm
CONTACTS SPACING	9,4mm
CONTACTS TYPE	SCREW CONTACTS(with protection plate)
NUMBER OF POLES	3POLES+EARTH
EARTH POSITIONING	H.6 (TURNABLE)
CABLE EXIT	PG7
SUITABLE CABLE	FROM ø4mm TO ø6mm
MAX.CONDUCTOR SIZE	0,75mm <sup>2</sup>
PROTECTION CLASS	IP67
CIRCUIT TYPE	WITHOUT ELECTRONIC
RATED VOLTAGE	250V AC / 300V DC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED NBR
FIXING SCREW	M3X0,5 L=28mm
CONNECTOR WITH H.T.P. LOGO	

**CUSTOMER APPROVAL**

SIGNATURE	DATE

**PLEASE SIGN AND RETURN**

Designer	SUGLIANI R.	Date	2017-10-19	Tolerance	±0,3	Units:	mm	Series	INDUSTRIAL STANDARD (form C)	Drawing n. 1/1
Approved	CIMMINO L.	Date	2017-10-19	Scale	1:1	Size:	A4	Customer code:		

**DESCRIPTION**

SQUARE MICRO CONNECTOR INDUSTRIAL STANDARD (form C),FIELD ATTACHABLE, 3P.+PE, WITHOUT ELECTRONIC, 250V AC/300V DC, BLACK HOUSING, PG7. CONNECTOR WITH H.T.P. LOGO.

**H.T.P.PART NUMBER**

P2NZ3000

A4

