



- BROWN ○ ———— ■ 1
- WHITE ○ ———— ■ 2
- BLUE ○ ———— ■ 3
- BLACK ○ ———— ■ 4
- GREY ○ ———— ■ 5

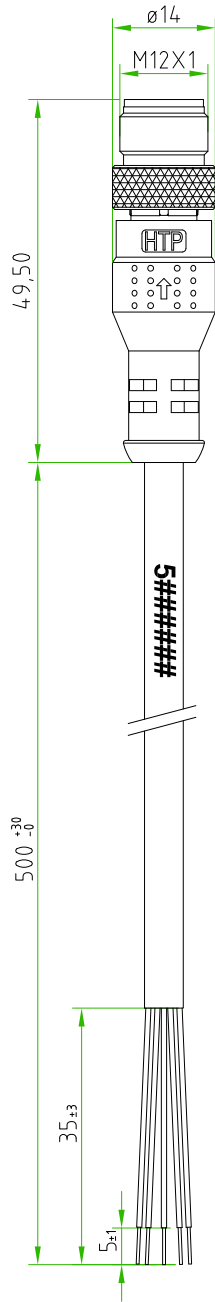

CONNECTOR FEATURES	
PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
CONNECTOR TYPE	STRAIGHT 180°
CONTACTS TYPE	MALE 5POLES
NUMBER OF CONTACTS CONNECTED	N°5
PROTECTION CLASS	IP69K
RATED VOLTAGE	60V AC/DC
RATED CURRENT	4 A
CONNECTOR WITH H.T.P.LOGO	
CABLE FEATURES	
H.T.P.CABLE CODE	REV.01 CAVO C-5-K6-R
NUMBER OF CONDUCTORS	N°5
CONDUCTORS SECTION	0,25mm ² (AWG24)
CABLE MATERIAL	PUR ULstyle21576 US
COATING COLOUR	BLACK
CONDUCTORS INSULATION MATERIAL	TPO
CABLE LENGHT	500mm
STRIPPING	35mm STANDARD
PEELING AND TINNING	5mm STANDARD
HIGH FLEX (CLASS 6)	
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	

<i>CUSTOMER APPROVAL</i>	
<i>SIGNATURE</i>	<i>DATE</i>
<i>PLEASE SIGN AND RETURN</i>	

Rev.	01	Modify	-	Date	2020.01.15	Signed	SUGLIANI CIMMINO	Approved	
Rev.		Modify		Date		Signed		Approved	
Rev.		Modify		Date		Signed		Approved	

Designer	SUGLIANI R.	Date	2020-01-15	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2020-01-15	Scale	1:1	Size:	A4	Customer code:		
								DESCRIPTION		H.T.P.PART NUMBER
								CIRCULAR CONNECTOR M12, MALE, STRAIGHT 180°, 5POLES, WITH CABLE PUR/TPO 5xAWG24, ULstyle 21576, BLACK COLOUR, HIGH FLEX, L=0,5m CONNECTOR WITH H.T.P.LOGO		12MD5C0E-K6-IS

