

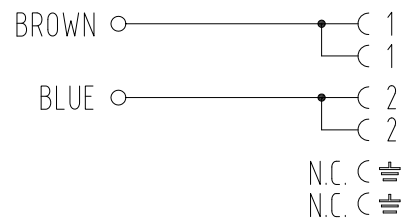

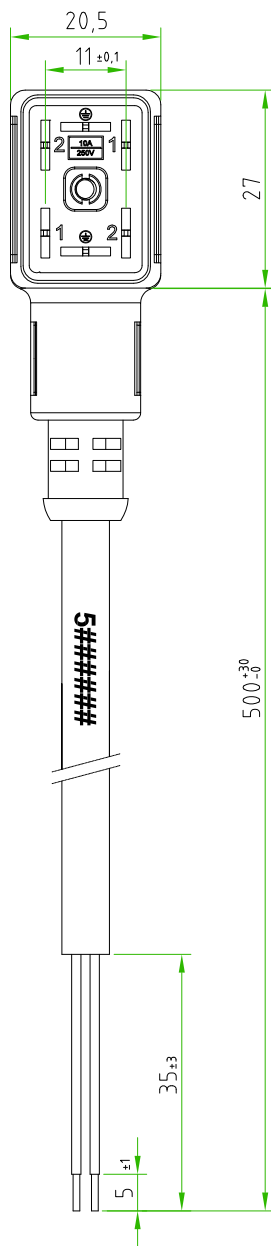


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved

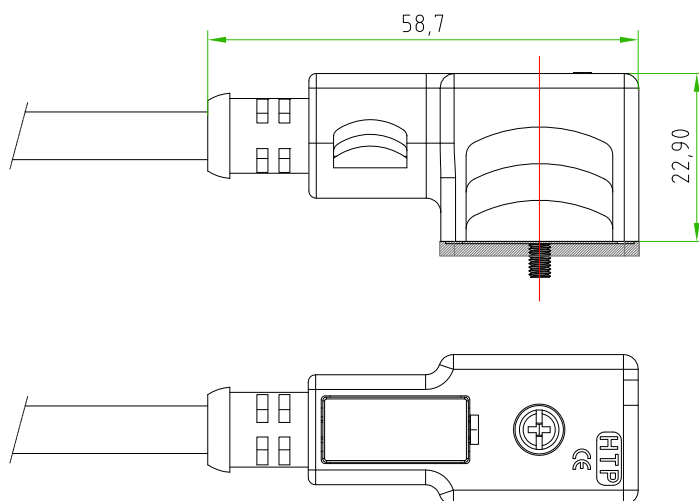

CONNECTOR FEATURES	PRODUCT TYPE	RECTANGULAR CONNECTOR INDUSTRIAL STANDARD (TYPE B)
	CONNECTOR COLOUR	BLACK
	CONTACTS SPACING	11mm
	NUMBER OF CONTACTS	2POLES+2EARTHS
	EARTH POSITIONING	H.6-12 NOT CONNECTED
	CENTRAL FIXING SCREW	M3X0,5 L=25mm
	GASKET TYPE	INTEGRATED (NBR)
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
	RATED VOLTAGE	250V AC/300 V DC
CABLE FEATURES	CONNECTOR WITH H.T.P. LOGO	
	H.T.P. CABLE CODE	CAVO A4
	NUMBER OF CONDUCTORS	N°2
	CONDUCTORS SECTION	0,5mm ²
	CABLE MATERIAL	PVC CEI2022IIOR
	COATING COLOUR	GREY RAL7032
	CONDUCTORS INSULATION MATERIAL	PVC
	CABLE LENGHT	500mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
	ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####	

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

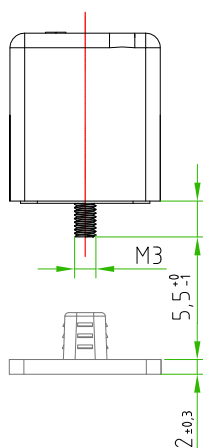

Designer	CIMMINO L.	Date	2016-03-17	Tolerance	±0.3	Units:	mm	Series	EN175301-803	Drawing n. 1-1
Approved	MAZZOLA M.	Date	2016-03-17	Scale	1:1	Size:	A4	Customer code:		
 		DESCRIPTION RECTANGULAR CONNECTOR EN175301-803 INDUSTRIAL STANDARD (type-B), 2P.+P.E.,11mm,BLACK,WITHOUT ELECTRONIC,250V AC/300V DC,WITH CABLE PVC/PVC, CEI2022IIOR,2X0.5mm ² ,GREY COLOUR,L=0,5m.CONNECTOR WITH H.T.P.LOGO							H.T.P.PART NUMBER CM1N02000CA40E	

