
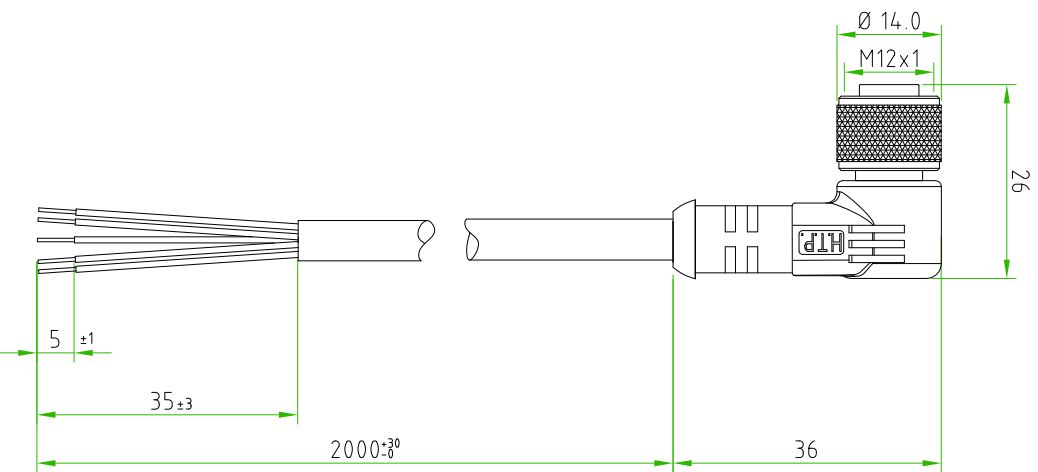


- BROWN ○ ——— C 1
- WHITE ○ ——— C 2
- BLUE ○ ——— C 3
- BLACK ○ ——— C 4
- GREY ○ ——— C 5



CABLE FEATURES		CONNECTOR FEATURES	
CONNECTOR TYPE		CONNECTOR TYPE	M12 90°
CONTACT TYPE		CONTACT TYPE	FEMALE SPOLES
CABLE LENGTH		CABLE LENGTH	2000mm
PROTECTION CLASS		PROTECTION CLASS	IP69K
STRIPPING		STRIPPING	35mm STANDARD
PEELING AND TINNING		PEELING AND TINNING	5mm STANDARD
NUMBER OF CONTACTS CONNECTED		NUMBER OF CONTACTS CONNECTED	N°5
RATED VOLTAGE		RATED VOLTAGE	125V AC/DC
RATED CURRENT		RATED CURRENT	4A
CONNECTOR WITH H.T.P. LOGO		CONNECTOR WITH H.T.P. LOGO	
H.T.P. CABLE CODE		H.T.P. CABLE CODE	CAVO D-5
NUMBER OF CONDUCTORS		NUMBER OF CONDUCTORS	N°5
CONDUCTOR SECTION		CONDUCTOR SECTION	0,34mm <sup>2</sup>
CABLE MATERIAL		CABLE MATERIAL	PUR
COATING COLOUR		COATING COLOUR	BLACK
CONDUCTOR INSULATION MATERIAL		CONDUCTOR INSULATION MATERIAL	PUR

TOLLERANZE	±0,3	DISIGNAZIONE	DATA	SCALA	DISIGNO N.
UDM	ANGOLO	LORENZO CHINNO CONTROLLATO	07.10.13	1:1	
DESCRIZIONE	M12 FEMALE 90° 5 POLES WITH CABLE PUR/PUR 5X0 34mm <sup>2</sup> BLACK1-2m CONNECTOR WITH H.T.P. LOGO			TR90	MATERIALE
					M12
<b>H.T.P.</b> HIGH TECH PRODUCTS				CODE	12FA5D22