


Rev.	Modify	Date	Signed	Approved

- BROWN ○ ○ ○ ○ ○ C 1
- WHITE ○ ○ ○ ○ ○ C 2
- BLUE ○ ○ ○ ○ ○ C 3
- BLACK ○ ○ ○ ○ ○ C 4
- GREY ○ ○ ○ ○ ○ C 5

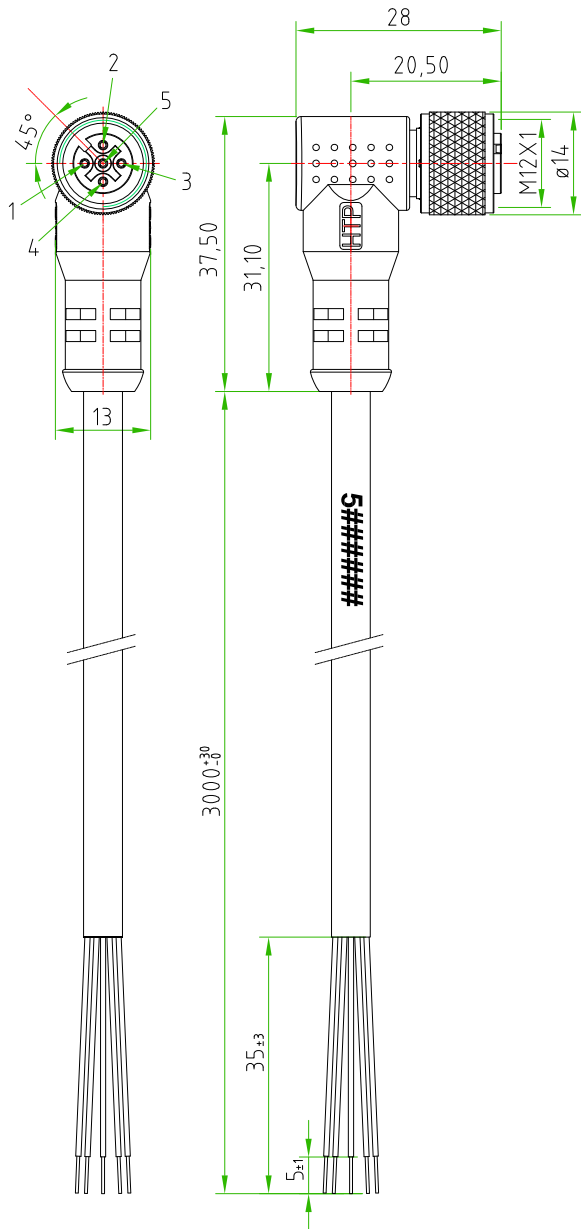

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
	CONNECTOR TYPE	ANGLED 90°
	CONTACTS TYPE	FEMALE 5POLES
	NUMBER OF CONTACTS CONNECTED	N°5
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	60V AC/DC
	RATED CURRENT	4A
CONNECTOR WITH H.T.P.LOGO		
CABLE FEATURES	H.T.P.CABLE CODE	CAVO D-5-K6-IS USE THE CABLE CAVO 29-5-K6-IS
	NUMBER OF CONDUCTORS	N°5
	CONDUCTORS SECTION	0,34mm <sup>2</sup> (AWG22)
	CABLE MATERIAL	PUR ULstyle21576
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	TPO
	CABLE LENGHT	3000mm
	STRIPPING	35mm STANDARD
	PEELING AND TINNING	5mm STANDARD
	HIGH FLEX (CLASS 6)	
CABLE PROVIDED BY H.T.P. ITALY		
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

A4

Designer	CIMMINO L.	Date	2018-10-31	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1		
Approved	SUGLIANI R.	Date	2018-10-31	Scale	1:1	Size:	A4	Customer code:				
HIGH TECH PRODUCTS S.R.L.									<b>DESCRIPTION</b> CIRCULAR CONNECTOR M12, FEMALE, ANGLED 90°, 5POLES, WITH CABLE PUR/TPO ULstyle21576 5x0.34mm <sup>2</sup> , BLACK COLOUR, HIGH FLEX, L=3m, CONNECTOR WITH H.T.P.LOGO		<b>H.T.P.PART NUMBER</b> 12FA5D3Z-K6-IS	