


- BROWN ○ ————— C 1
- WHITE ○ ————— C 2
- BLUE ○ ————— C 3
- BLACK ○ ————— C 4
- GREY ○ ————— C 5

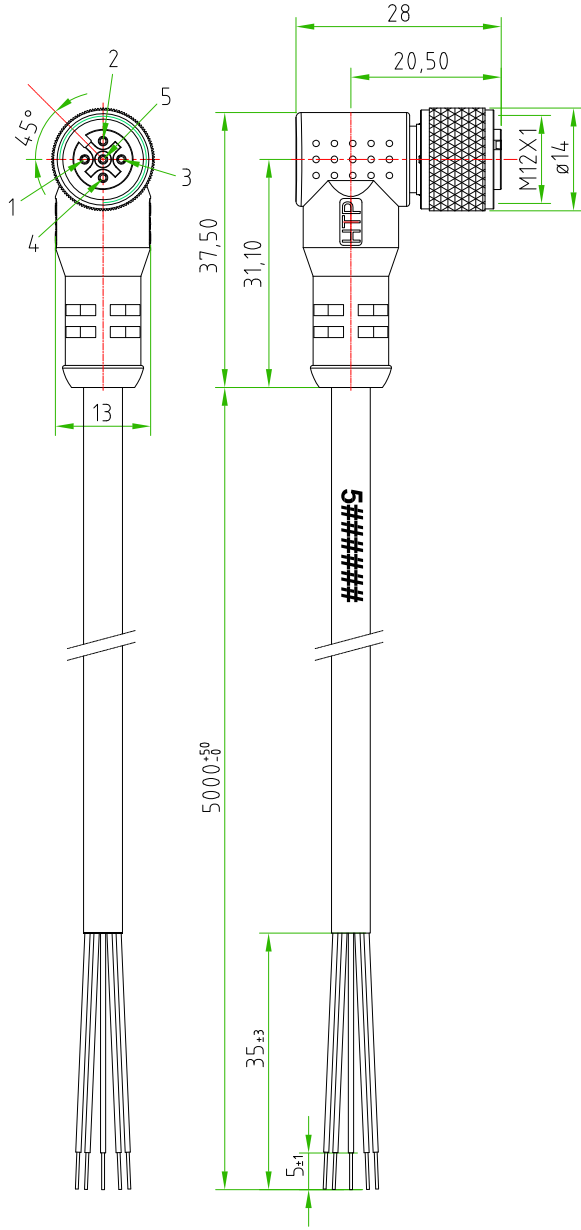

CONNECTOR FEATURES	
PRODUCT TYPE	M12 CIRCULAR CONNECTOR WITH MOULDED CABLE
CONNECTOR TYPE	ANGLED 90°
CONTACTS TYPE	FEMALE 5POLES
NUMBER OF CONTACTS CONNECTED	N°5
PROTECTION CLASS	IP69K
RATED VOLTAGE	60V AC/DC
RATED CURRENT	4A
CONNECTOR WITH H.T.P.LOGO	
CABLE FEATURES	
H.T.P.CABLE CODE	CAVO D-5-K6-IS USE THE CABLE CAVO 29-5-K6-IS
NUMBER OF CONDUCTORS	N°5
CONDUCTORS SECTION	0,34mm <sup>2</sup> (AWG22)
CABLE MATERIAL	PUR ULstyle21576  IS
COATING COLOUR	BLACK
CONDUCTORS INSULATION MATERIAL	TPO
CABLE LENGHT	5000mm
STRIPPING	35mm STANDARD
PEELING AND TINNING	5mm STANDARD
HIGH FLEX (CLASS 6)	
CABLE PROVIDED BY H.T.P. ITALY	
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE #####S	

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Rev.	Modify	Date	Signed	Approved

Designer	SUGLIANI R.	Date	2017-05-23	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2017-05-23	Scale	1:1	Size:	A4	Customer code:		
<b>DESCRIPTION</b> CIRCULAR CONNECTOR M12, FEMALE, ANGLED 90°, 5POLES, WITH CABLE PUR/TPO ULstyle21576 5x0.34mm <sup>2</sup> , BLACK COLOUR, HIGH FLEX, L=5m, CONNECTOR WITH H.T.P.LOGO										<b>H.T.P.PART NUMBER</b>  12FA5D5Z-K6-IS

