


Rev.	Modify	Date	Signed	Approved

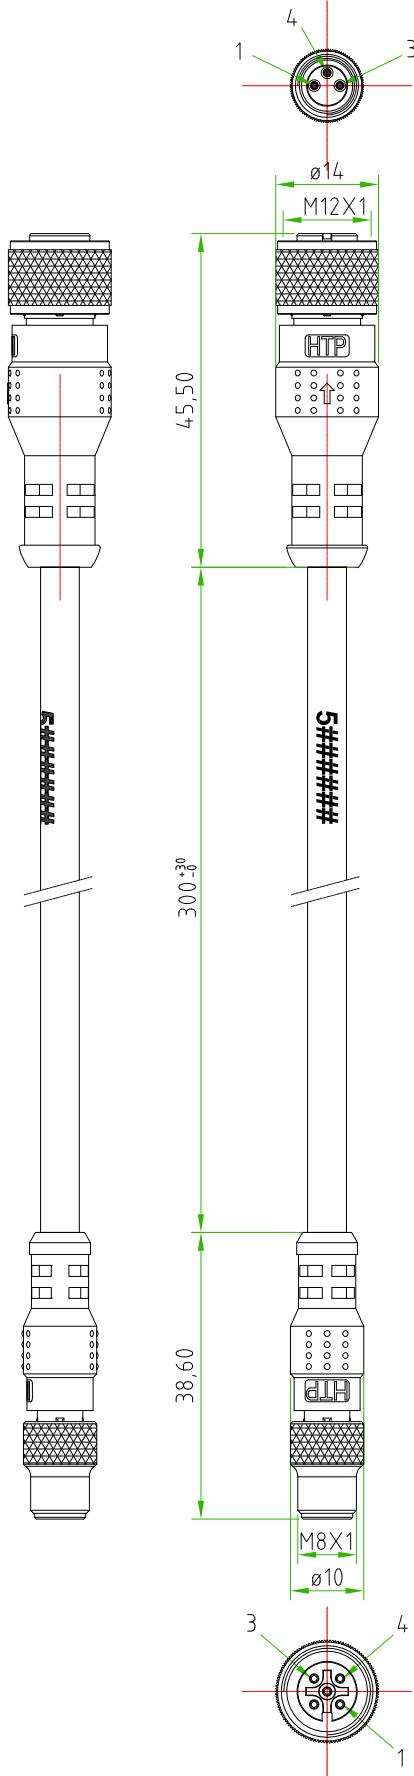

CONNECTOR FEATURES	PRODUCT TYPE	EXTENSION M12-M8 CIRCULAR CONNECTORS WITH MOULDED CABLE
	M12 CONNECTOR TYPE	STRAIGHT 180° FEMALE 3POLES
	M8 CONNECTOR TYPE	STRAIGHT 180° MALE 3POLES
	NUMBER OF CONTACTS CONNECTED	N°3
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	50V AC / 60V DC
	RATED CURRENT	3A
CONNECTORS WITH H.T.P.LOGO		
CABLE FEATURES	H.T.P.CABLE CODE	CAVO C-3-IS USE THE CABLE CAVO-31-K6-IS
	NUMBER OF CONDUCTORS	N°3
	CONDUCTORS SECTION	0,25mm <sup>2</sup> (AWG 24)
	CABLE MATERIAL	PUR ULstyle21576
	COATING COLOUR	BLACK
	CONDUCTORS INSULATION MATERIAL	TPO
	CABLE LENGHT	300mm
HIGH FLEX (CLASS 6)		
CABLE PROVIDED BY H.T.P. ITALY		
ON THE CABLE, NEAR THE CONNECTOR HEAD, MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		
EXTENSION WITHOUT THE HOLDERS FOR CABLE MARKING.		

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	CIMMINO L.	Date	2015-02-16	Tolerance	±0.3	Units:	mm	Series	M12-M8	Drawing n. 1-1
Approved	MAZZOLA M.	Date	2015-02-16	Scale	1:1	Size:	A4	Customer code:		
<b>DESCRIPTION</b> EXTENSION CIRCULAR CONNECTORS M12,FEMALE,STRAIGHT 180°,3POLES+M8 MALE,STRAIGHT 180°,3POLES,WITH CABLE PUR/TPO,3x0,25mm <sup>2</sup> ,BLACK COLOUR, HIGH FLEX,ULstyle21576,L=0,3m.CONNECTORS WITH H.T.P.LOGO									<b>H.T.P.PART NUMBER</b> 12FD3C0C08MD-K6-IS	

